



^{24/7}
Backup Advanced Backup Manager (B247PRO) v9
MySQL Database Backup & Restore for Linux (CLI)

Copyright Notice

© 2023 Backup247 Pty Ltd. All rights reserved.

The use and copying of this product is subject to a license agreement. Any other use is prohibited. No part of this publication may be reproduced, transmitted, transcribed, stored in a retrieval system, or translated into any language in any form by any means without prior written consent of Backup247 Pty Limited. Information in this manual is subject to change without notice and does not represent a commitment on the part of the vendor, Backup247 Pty Limited does not warrant that this document is error free. If you find any errors in this document, please report to Backup247 Pty Limited in writing.

Trademarks

Backup247, Backup247 Cloud Backup Suite (B247CBS), Backup247 Advanced Backup Suite (B247PRO), Backup247 Offsite Backup Server, Backup247 Standard Backup Suite (B247LITE), Backup247 Replication Server, Backup247 BackupBox Firmware, Backup247 Universal Backup System and Backup247 NAS Client Utility, Backup247 Mobile are trademarks of Backup247 Pty Limited.

Amazon S3 is a registered trademark of Amazon Web Services, Inc., or its affiliates.

Apple and Mac OS X, macOS, and iOS are registered trademarks of Apple Computer, Inc.

Dropbox is a registered trademark of Dropbox Inc.

Google Cloud Storage, Google Drive, Google Authenticator, and Android are registered trademarks of Google Inc.

Backblaze B2 Cloud Storage is a registered trademark of Backblaze Inc.

MariaDB is a registered trademark of MariaDB Corporation AB.

Lotus, Domino, and Notes are registered trademark of IBM Corporation.

Microsoft Windows, Microsoft Exchange Server, Microsoft SQL Server, Microsoft Hyper-V, Microsoft Azure, OneDrive, OneDrive for Business, Microsoft Authenticator, and Microsoft Office 365 are registered trademarks of Microsoft Corporation.

Oracle, Oracle Database, Java and MySQL are registered trademarks of Oracle and/or its affiliates. Other names may be trademarks of their respective owners.

OpenJDK is a registered trademark of Oracle America, Inc.

Rackspace and OpenStack are registered trademarks of Rackspace US, Inc.

Red Hat, Red Hat Enterprise Linux, the Shadowman logo and JBoss are registered trademarks of Red Hat, Inc. www.redhat.com in the U.S. and other countries.

Linux is a registered trademark of Linus Torvalds in the U.S. and other countries.

Ubuntu is a registered trademark of Canonical Ltd.

Debian is a registered trademark of Software in the Public Interest, Inc.

Rocky is a registered trademark of Rocky Brands.

ShadowProtect is a registered trademark of StorageCraft Technology Corporation.

VMware ESXi, vCenter, and vSAN are registered trademarks of VMware, Inc.

All other product names are registered trademarks of their respective owners.

Disclaimer

Backup247 Pty Limited will not have or accept any liability, obligation, or responsibility whatsoever for any loss, destruction or damage (including without limitation consequential loss, destruction or damage) however arising from or in respect of any use or misuse of reliance on this document. By reading and following the instructions in this document, you agree to accept unconditionally the terms of this Disclaimer and as they may be revised and/or amended from time to time by Backup247 Pty Limited without prior notice to you.

Revision History

Date	Descriptions	Version
11 February 2022	▪ Appendix A, B, C and D – added deduplication	9.1.0.0


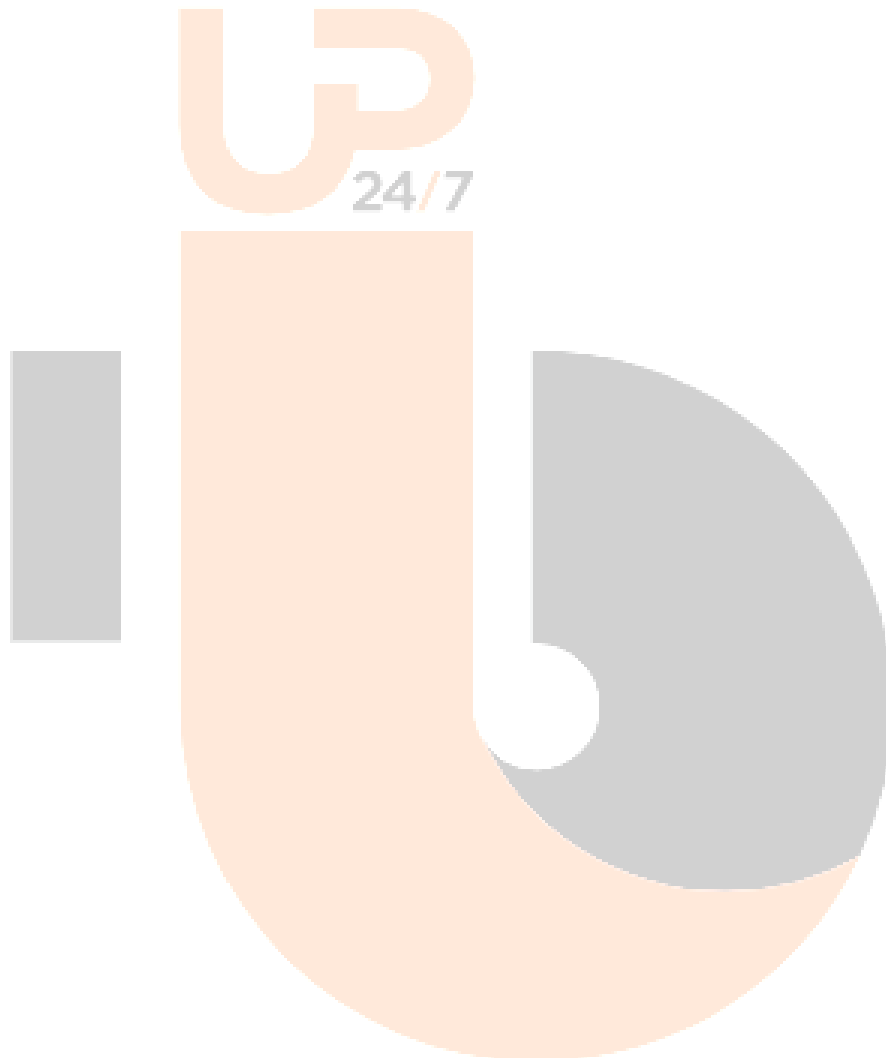


Table of Contents

1	Overview	1
1.1	What is this software?	1
1.2	System Architecture	1
1.3	MySQL Database Backup Method	2
1.4	Mysqldump Parameters	2
2	Preparing for Backup and Restore	3
2.1	Hardware Requirement	3
2.2	Software Requirement	3
2.3	Backup247 Advanced Client (B247PRO) Installation	3
2.4	Add-on Module Requirement	3
2.5	Backup Quota Requirement	4
2.6	MySQL Database Server Requirements	4
2.6.1	MySQL Version	4
2.6.2	MySQL Database Status	4
2.6.3	TCP/IP Port	4
2.6.4	Mysqldump Utility	5
2.6.5	Mysqldump Utility Version	5
2.6.6	User Account Privileges	6
2.6.7	Localhost	7
2.6.8	MySQL Virtual System Databases	8
2.6.9	Temporary Directory	8
3	Creating a MySQL Database Backup Set	9
3.1	Create a MySQL Database Backup Set using B247CBS	10
3.2	Create a MySQL Database Backup Set using command line	20
4	Overview on the Backup Process	23
5	Running Backup Jobs	24
6	Restoring Data	26
6.1	Automatic MySQL Database Restore	26
6.2	Manual MySQL Database Restore	31
	Recovering MySQL Databases	32
7	Contact Backup247	34
7.1	Technical Assistance	34
7.2	Documentation	34
	Appendix	35
	Appendix A MySQL Backup Set XML Template (Raw)	35

Appendix B MySQL Backup Set XML Template (with explanation)	39
Appendix C Example: MySQL Database Backup Set with normal backup schedule	46
Appendix D Example: MySQL Database Backup Set with periodic backup schedule	49

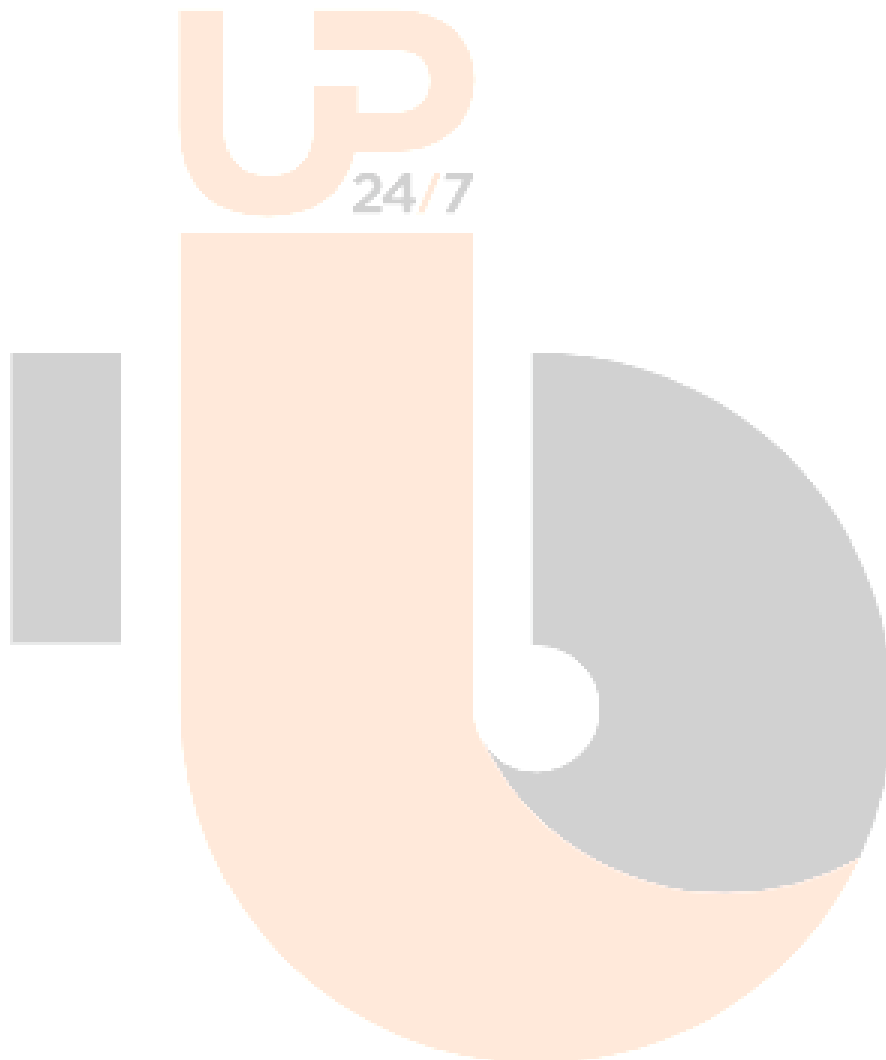

1 Overview

1.1 What is this software?


Backup247 brings you specialized client backup software, namely Backup247 Advanced Client (B247PRO), to provide a set of tools to protect your MySQL Database Server.

1.2 System Architecture

Below is the system architecture diagram illustrating the major elements involved in the backup and restore process between MySQL Database Server, Backup247 Advanced Client (B247PRO) and B247CBS.

In this user guide, we will focus on the end to end backup and restore process using Backup247 Advanced Client (B247PRO) as a client backup software.




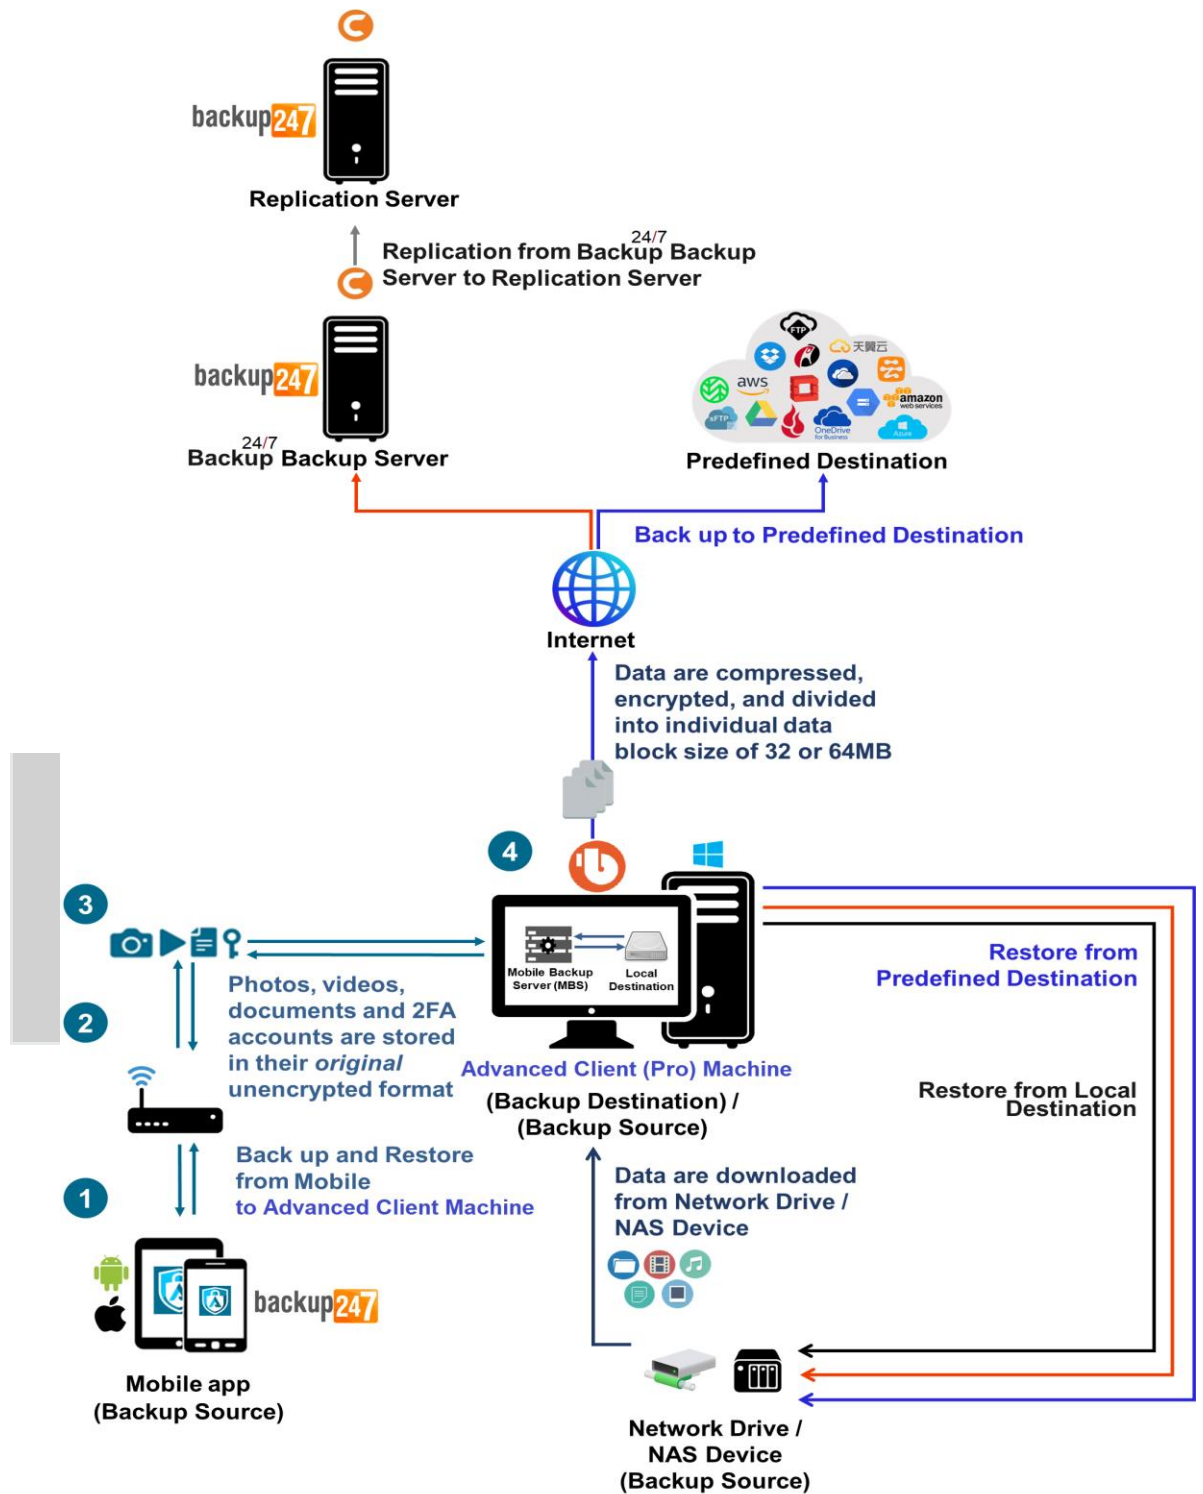

1.3 MySQL Database Backup Method

Backup247 Advanced Client (B247PRO) MySQL Database backup uses a spooling method to make a consistent snapshot of the database(s) for backup.

For each database backup job Backup247 Advanced Client (B247PRO) will trigger MySQL to spool or make a copy of the database (.sql) file to the temporary folder using the mysqldump utility.

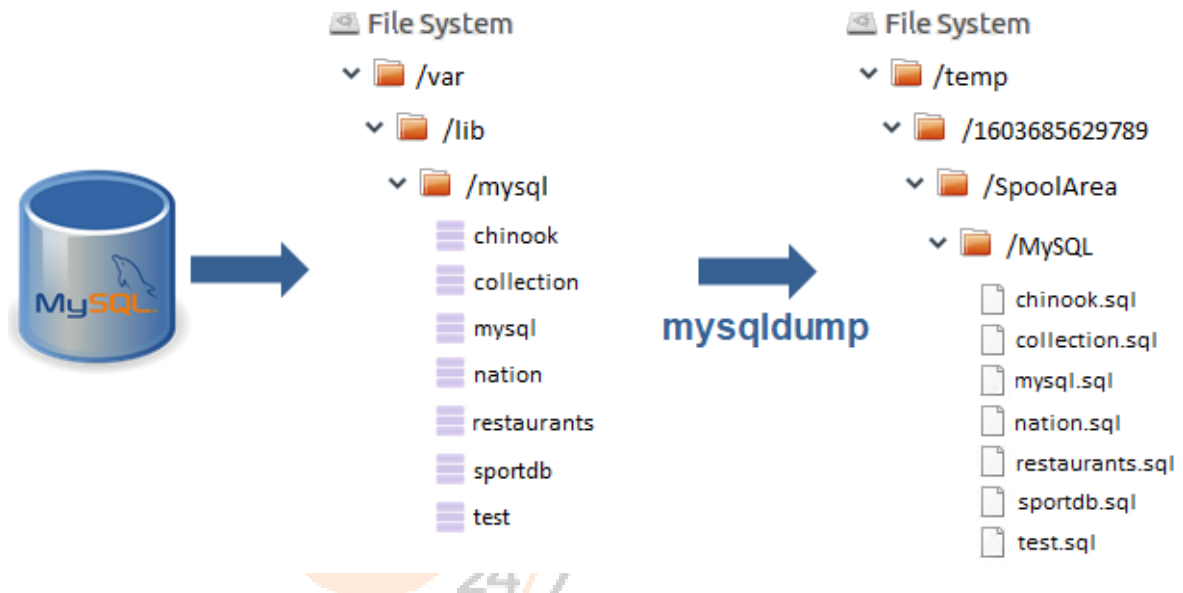

1.4 Mysqldump Parameters

Here is the mysqldump parameter list used for generating the spooled dump file:

- --databases
- --password
- --result-file
- --port
- --user
- --host
- --opt
- --quote-names
- --allow-keywords
- --triggers

Example:

For spooling of the “collection” database to /temp folder, the following parameters will be used:
 Mysqldump --databases collection --user=user1 --password=qwerty --host=localhost --port=3306 --opt --quote-names --allow-keywords --triggers --result-file=/temp/collection.sql

For details on mysqldump parameters please refer to <https://dev.mysql.com/doc/refman/8.0/en/mysqldump.html>

2 Preparing for Backup and Restore

2.1 Hardware Requirement

To achieve the optimal performance when Backup247 Advanced Client (B247PRO) is running on your machine, refer to the following article for the list of hardware requirements.

FAQ: Backup247 Hardware Requirement List (HRL) for version 9.1 or above

2.2 Software Requirement

Make sure the operating system where you have the MySQL Database Server installed is compatible with the Backup247 Advanced Client (B247PRO). Refer to the following article for the list of compatible operating systems and application versions.

FAQ: Backup247 Software Compatibility List (SCL) for version 9.1 or above

2.3 Backup247 Advanced Client (B247PRO) Installation

Make sure that the latest version of Backup247 Advanced Client (B247PRO) is installed directly on the machine where the MySQL database(s) are hosted.

NOTE

Backup and restore of MySQL database(s) running on a remote machine is not supported.

2.4 Add-on Module Requirement

Make sure the MySQL Database Server feature has been enabled as an add-on module in your Backup247 Advanced Client (B247PRO) user account.

Please contact your backup service provider for more details.

The screenshot shows the 'Backup Client Settings' tab for a user profile. Under the 'Add-on Modules' section, the following modules are listed with their respective checkboxes:

- Microsoft Exchange Server
- MySQL Database Server
- Lotus Domino
- Windows System Backup
- VMware (Guest VM: 0)
- Microsoft Exchange Mailbox (0)
- NAS - QNAP
- Mobile (max. 10)
- Volume Shadow Copy
- OpenDirect / Granular Restore (0)
- MariaDB Database Server
- Microsoft SQL Server
- Oracle Database Server
- Lotus Notes
- Windows System State Backup
- Hyper-V (Guest VM: 0)
- ShadowProtect System Backup
- NAS - Synology
- Continuous Data Protection
- In-File DeltaOnly apply to v8 or before
- Office 365 Backup (0)
- Deduplication

2.5 Backup Quota Requirement

Make sure that your Backup247 Advanced Client (B247PRO) user account has sufficient quota assigned to accommodate the storage of MySQL Database Server backup set and retention policy.

Please contact your backup service provider for more details.

2.6 MySQL Database Server Requirements

Please ensure that the following requirements and conditions are met on the MySQL database server.

2.6.1 MySQL Version

Backup247 Advanced Client (B247PRO) is installed on the MySQL version 5.7 or above database server using the root account.

2.6.2 MySQL Database Status

The MySQL database instance is online.

Example: MySQL5.7 on CentOS 7

```
# service mysqld status
Redirecting to /bin/systemctl status mysqld.service
● mysqld.service - MySQL Server
   Loaded: loaded (/usr/lib/systemd/system/mysqld.service; enabled;
   vendor preset disabled)
   Active: active (running) since Fri 2022-02-04 11:42:08 HKT; 2h
   46min ago
     Docs: man:mysqld(8)
           http://dev.mysql.com/doc/refman/en/using-systemd.html
   Main PID: 16952 (mysqld)
   CGroup: /system.slice/mysqld.service
           └─16952 /usr/sbin/mysqld --daemonize --pid-
file=/var/run/mysqld/my...

Jan 02 11:42:00 centos7 systemd[1]: Starting MySQL Server...
Jan 02 11:42:08 centos7 systemd[1]: Started MySQL Server.
```

2.6.3 TCP/IP Port

Check the listening port of the MySQL database instance (default is 3306).

```
# netstat -an|more
Active Internet connections (servers and established)
Proto Recv-Q Send-Q Local Address           Foreign Address         State
tcp        0      0 0.0.0.0:111             0.0.0.0:*               LISTEN
tcp        0      0 0.0.0.0:80             0.0.0.0:*               LISTEN
tcp        0      0 192.168.122.1:53       0.0.0.0:*               LISTEN
tcp        0      0 0.0.0.0:22             0.0.0.0:*               LISTEN
tcp        0      0 127.0.0.1:631          0.0.0.0:*               LISTEN
tcp        0      0 127.0.0.1:60024        0.0.0.0:*               LISTEN
tcp        0      0 127.0.0.1:25           0.0.0.0:*               LISTEN
tcp        0      0 0.0.0.0:443           0.0.0.0:*               LISTEN
tcp        86      0 10.16.30.2:37272       203.186.85.237:443     CLOSE_WAIT
tcp        86      0 10.16.30.2:49302       40.114.13.14:443      CLOSE_WAIT
tcp        0      64 10.16.30.2:22         192.168.12.1:55777    ESTABLISHED
tcp6       0      0 :::111                 :::*                    LISTEN
tcp6       0      0 :::22                  :::*                    LISTEN
tcp6       0      0 :::1:631               :::*                    LISTEN
```

tcp6	0	0	:::1:25	:::*	LISTEN
tcp6	0	0	:::3306	:::*	LISTEN
tcp6	86	0	10.16.30.2:48396	10.16.30.21:443	CLOSE_WAIT
tcp6	86	0	10.16.30.2:48428	10.16.30.21:443	CLOSE_WAIT

2.6.4 Mysqldump Utility

The **mysqldump** utility is installed on the MySQL database server.

To locate the **mysqldump** utility use the **whereis** command:

```
# whereis mysqldump
mysqldump: /usr/bin/mysqldump /usr/share/man/man1/mysqldump.1.gz
```

2.6.5 Mysqldump Utility Version

The **mysqldump** utility is the same version as the MySQL database.

To check the **mysqldump** version use the **mysqldump --version** command

Example: MySQL 5.7 on CentOS 7.3

```
# mysqldump --version
mysqldump Ver 10.13 Distrib 5.7.23, for Linux (x86_64)
```

To check the MySQL database version either:

- i. From the Linux command line, use the **/usr/bin/mysql --version** command.

```
# /usr/bin/mysql --version
/usr/bin/mysql Ver 14.14 Distrib 5.7.23, for Linux (x86_64)
using EditLine wrapper
```

- ii. Log in to MySQL instance and use the **select version();** command

```
# mysql -u root -p
Enter password:
Welcome to the MySQL monitor.  Commands end with ; or \g.
Your MySQL connection id is 3
Server version: 5.7.23 MySQL Community Server (GPL)

Copyright (c) 2000, 2018, Oracle and/or its affiliates. All
rights reserved.

Oracle is a registered trademark of Oracle Corporation and/or its
affiliates. Other names may be trademarks of their respective
owners.

Type 'help;' or '\h' for help. Type '\c' to clear the current
input statement.

mysql> select version();
+-----+
| version() |
+-----+
| 5.7.23    |
+-----+
1 row in set (0.00 sec)
```

Example: MySQL 8 on CentOS 7.4

To check the mysqldump version use the `mysqldump --version` command

```
# mysqldump --version
mysqldump Ver 8.0.11 for Linux on x86_64 (MySQL Community Server - GPL)
```

To check the MySQL database version either:

- i. From the Linux command line use the `/usr/bin/mysql --version` command.

```
# /usr/bin/mysql --version
/usr/bin/mysql Ver 8.0.11 for Linux on x86_64 (MySQL Community Server - GPL)
```

- ii. Log in to MySQL instance and use the `select version();` command

```
# mysql -u root -p
Enter password:
Welcome to the MySQL monitor.  Commands end with ; or \g.
Your MySQL connection id is 9
Server version: 8.0.11 MySQL Community Server - GPL

Copyright (c) 2000, 2018, Oracle and/or its affiliates. All rights reserved.

Oracle is a registered trademark of Oracle Corporation and/or its affiliates. Other names may be trademarks of their respective owners.

Type 'help;' or '\h' for help. Type '\c' to clear the current input statement.

mysql> select version();
+-----+
| version() |
+-----+
| 8.0.11    |
+-----+
1 row in set (0.00 sec)
```

2.6.6 User Account Privileges

A MySQL database user account with the following privileges must be setup for the backup operation.

Example: MySQL 5.7

```
mysql> GRANT ALL PRIVILEGES ON *.* TO 'username'@'localhost'
IDENTIFIED BY 'password';
Query OK, 0 rows affected, 1 warning (0.00 sec)

mysql> GRANT ALL PRIVILEGES ON *.* TO
'username'@'localhost.localdomain' IDENTIFIED BY 'password';
Query OK, 0 rows affected, 1 warning (0.00 sec)

mysql> FLUSH PRIVILEGES;
Query OK, 0 rows affected, 1 warning (0.00 sec)

mysql>
```

For MySQL 8 the use of GRANT to define account authentication characteristic is deprecated. For more information, please refer to the MySQL 8.0 Reference Manual. As an alternative, you must first create the user and set the authentication characteristic by using CREATE USER before setting the privileges of the user using GRANT.

Example: MySQL 8

```
mysql> GRANT ALL PRIVILEGES ON *.* TO 'username'@'localhost';
Query OK, 0 rows affected (0.08 sec)

mysql> CREATE USER 'username'@'localhost.localdomain' IDENTIFIED BY
'password';
Query OK, 0 rows affected (0.46 sec)

mysql> GRANT ALL PRIVILEGES ON *.* TO
'username'@'localhost.localdomain';
Query OK, 0 rows affected (0.22 sec)

mysql> FLUSH PRIVILEGES;
Query OK, 0 rows affected (0.23 sec)

mysql>
```

2.6.7 Localhost

Verify that 'localhost' on the MySQL database server is resolvable using the command `ping localhost`.

```
# ping -c 5 localhost
PING localhost (127.0.0.1) 56(84) bytes of data.
64 bytes from localhost (127.0.0.1): icmp_seq=1 ttl=64 time=0.189 ms
64 bytes from localhost (127.0.0.1): icmp_seq=2 ttl=64 time=0.054 ms
64 bytes from localhost (127.0.0.1): icmp_seq=3 ttl=64 time=0.054 ms
64 bytes from localhost (127.0.0.1): icmp_seq=4 ttl=64 time=0.057 ms
64 bytes from localhost (127.0.0.1): icmp_seq=5 ttl=64 time=0.057 ms

--- localhost ping statistics ---
5 packets transmitted, 5 received, 0% packet loss, time 4000ms
rtt min/avg/max/mdev = 0.054/0.082/0.189/0.053 ms
```

'localhost' is allowed to access the MySQL database instance on the MySQL service listening port (default 3306) using the command `telnet localhost 3306`.

```
#telnet 127.0.0.1 3306
Trying 127.0.0.1...
Connected to 127.0.0.1.
Escape character is '^]'.
J
5.7.24i6&VeFS!F<t'zmysql_native_password
```

2.6.8 MySQL Virtual System Databases

The 'information_schema' and 'performance_schema' are MySQL virtual system databases which contains information about the user databases on the MySQL instance, are automatically excluded from the backup source. They are read-only and cannot be backed up.

```
mysql> show databases;
+-----+
| Database |
+-----+
| information_schema |
| mysql |
| performance_schema |
| sys |
+-----+
4 rows in set (0.00 sec)

mysql>
```

2.6.9 Temporary Directory

The databases selected for backup will be temporarily spooled to a temporary directory before being uploaded to the backup server or destination storage.

Ensure that the temporary directory configured for the MySQL database backup has sufficient disk space for the backup operation, the free space on the temporary directory drive should be at least 130% of the database size. As the temporary directory is also used for storing index files and any incremental or differential delta files generated during the backup job before they are uploaded to the backup destination.

Please bear in mind the size of the databases may grow over time and you may need to review the temporary directory free space requirements on a regular basis.

To calculate for the size of your databases, run the command below.

```
mysql> SELECT table_schema AS "Database", ROUND(SUM(data_length +
index_length) / 1024 / 1024, 2) AS "Size (MB)" FROM
information_schema.TABLES GROUP BY table_schema;
+-----+-----+
| Database | Size (MB) |
+-----+-----+
| information_schema | 0.16 |
| mysql | 2.43 |
| performance_schema | 0.00 |
| sys | 0.02 |
+-----+-----+
4 rows in set (0.04 sec)

mysql>
```

3 Creating a MySQL Database Backup Set

Startup Backup247 Advanced Client (B247PRO).

For instructions on how to do this refer to Chapter 5 of the Backup247 Advanced Client (B247PRO) v9 Quick Start Guide for Linux (CLI).

There are two options to create a MySQL Database Backup Set for Linux.

- Using B247CBS web console

For backup set creation on B247CBS web console, most backup set preferences may be configured using B247CBS except the following:

- backup set encryption key settings
- MySQL login password

After the backup set preferences are setup on the B247CBS web console, to complete the backup set creation process the RunConfigurator.sh script will need to be used on the MySQL machine to do the following:


- to setup the backup set encryption key settings
- to export/import the backupSet.xml file to setup the MySQL login password
- Using command line

For backup set creation using command line, most backup set preferences may be configured using the backupSet.xml file.


To complete the backup set creation process after successfully importing the backupSet.xml file, the RunConfigurator.sh script will need to be used on the MySQL machine to setup the backup set encryption key settings.


3.1 Create a MySQL Database Backup Set using B247CBS

1. Log in to B247CBS and go to User.

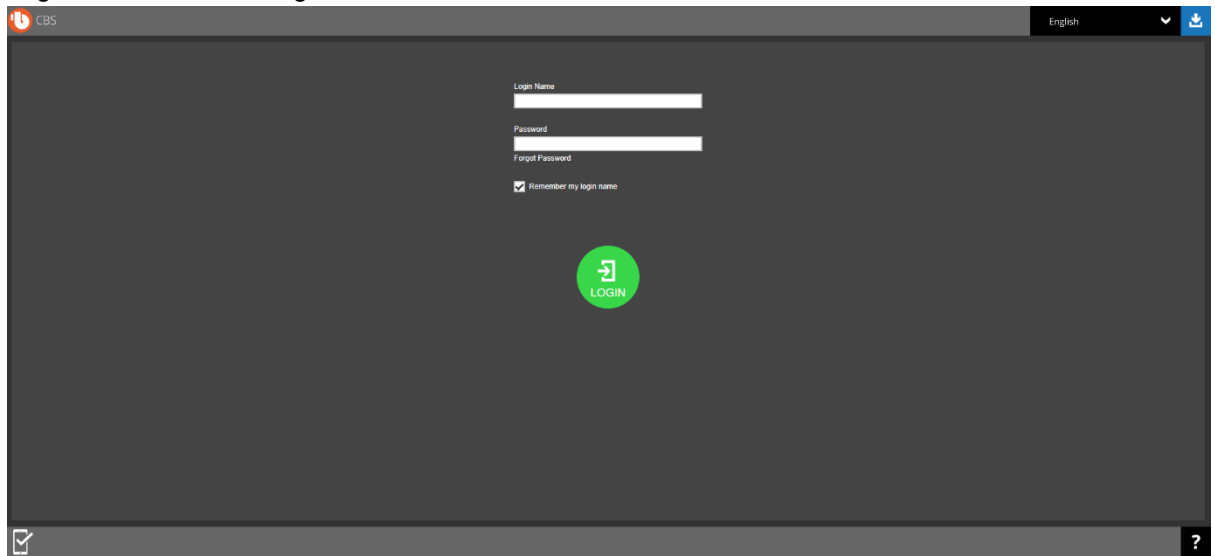

2. Go to Backup Set then click the **+** button to create a backup set.

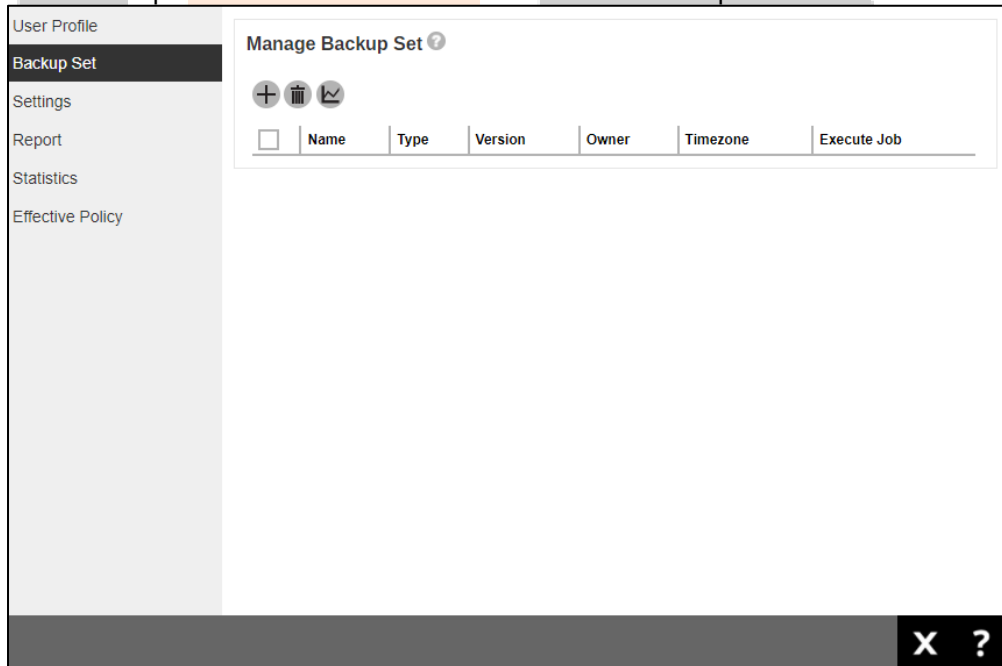

- Input the **Name**, select the **Type** which should be 'MySQL Backup' and **Platform** which should be 'Linux'. Update the Host and Port. Default settings for these are 'localhost' and '3306' respectively. Input the **Path to mysqldump** then click .

Create Backup Set

General

Name

Backup set type

Platform

MySQL Server

Login ID

Password

Host Port



Path to mysqldump

➔ ✕ ?

- Add the backup source in the **Other Selected Source** by clicking the  button e.g. path is MySQL/employees.

Backup Source

Other Selected Source

Path



MySQL/employees

MySQL/test

To back up all databases in the MySQL machine, use the path MySQL.


Backup Source

Other Selected Source

Path

MySQL

Input the path of the source to be backed up. Click the  button to add the source. Keep doing this until all the backup source are added.

Other Selected Source

Path

+
X
?

To exclude a source, you can add it under **Deselected Source** by clicking the  button.

NOTE

Always add the 'information_schema' and 'performance_schema' databases under **Deselected Source** since they are MySQL virtual system databases. They are read-only and cannot be backed up.



Deselected Source

+
🗑️

Path

MySQL/information_schema

MySQL/performance_schema

Input the path of the source to be excluded in the backup. Click the  button to add the deselected source. Keep doing this until all source to be excluded are added. Click .

Deselected Source


Path




+
X
?


- The **Run scheduled backup for this backup set** is turned on by default. If you do not want to create a backup schedule you can turn it off by sliding the lever to the left. By default, there is already a backup schedule created that is scheduled to run daily at 3am until full backup is completed. This schedule may either be edited or deleted if you want to create your own backup schedule.

NOTE

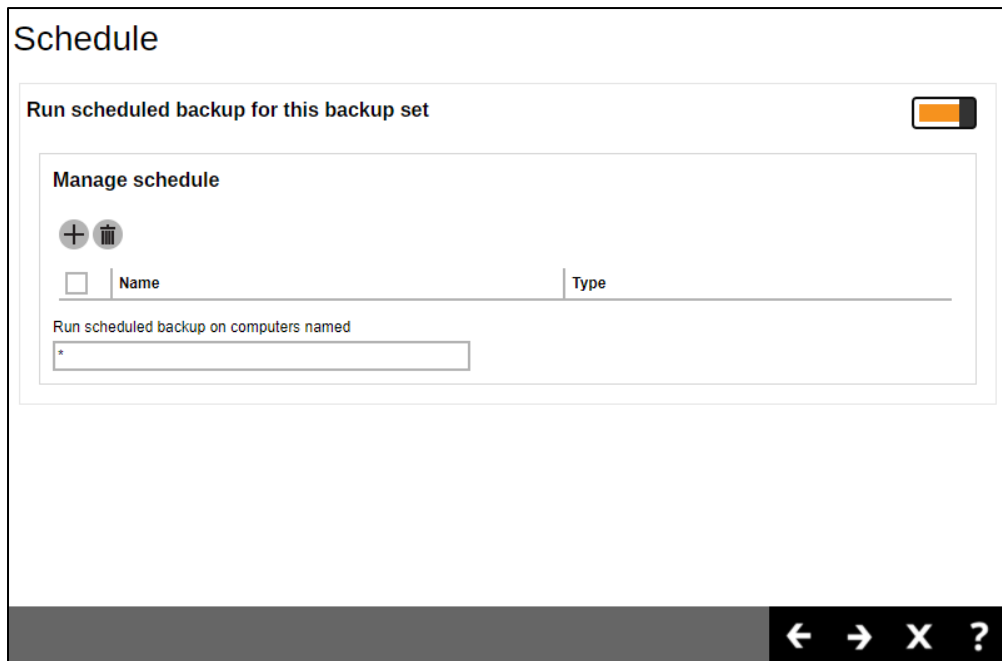It is optional to input the computer name in the **Run scheduled backup on computers named** field since it will be updated once backup set creation is completed in the Backup247 Advanced Client (B247PRO) client. In Step 15, the computer name can be checked as the Owner.



Click the  button to add a new backup schedule. Once done setting the schedule click  then  to proceed.

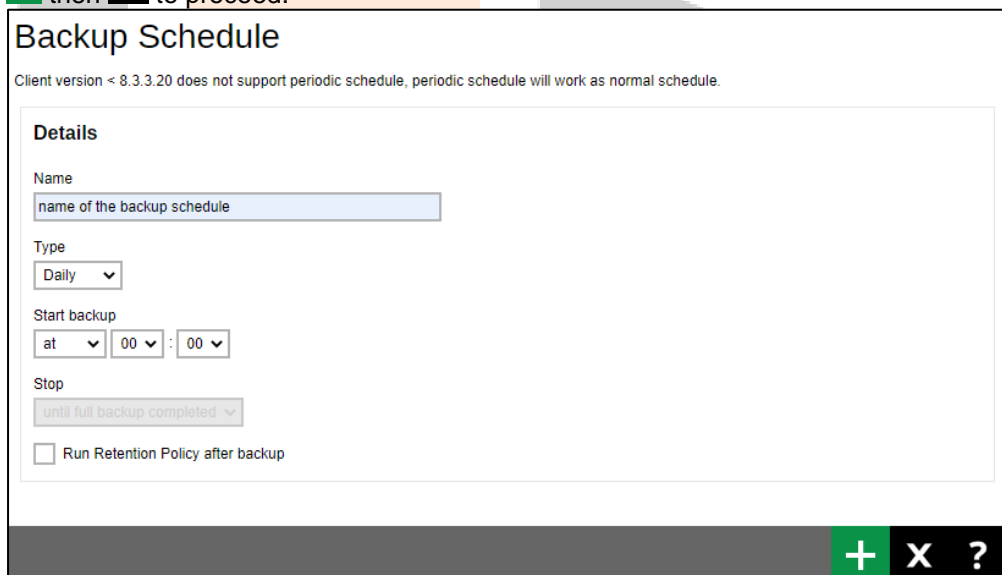

6. Select the **Backup Mode** if Concurrent or Sequential. By default, **Sequential** is selected. In Sequential backup mode, if there are multiple destinations configured in the backup set, Backup247 Advanced Client (B247PRO) will back up to one destination at a time. In **Concurrent** backup mode, if there are multiple destinations configured in the backup set, Backup247 Advanced Client (B247PRO) will backup to all destinations at the same time or concurrently.

NOTE

For backup sets with multiple destinations, sequential backup mode will take longer compared with concurrent backup mode.

Destination

Backup Mode
Sequential ▾

+ -

Name

If **Concurrent** is selected, specify the maximum number of backup destinations.

Destination

Backup Mode
Concurrent ▾

Maximum concurrent backup destinations

Unlimited ▾
Unlimited
2
3
4
5
6
7
8
9
10

← → X ?

Click the + button to add a standard and/or predefined destinations.



Destination


Backup Mode
Sequential ▾


+ -


Name

← → X ?

Select your desired destination, it could be one or both displayed destinations. Tick the checkbox and click  to proceed. Click .

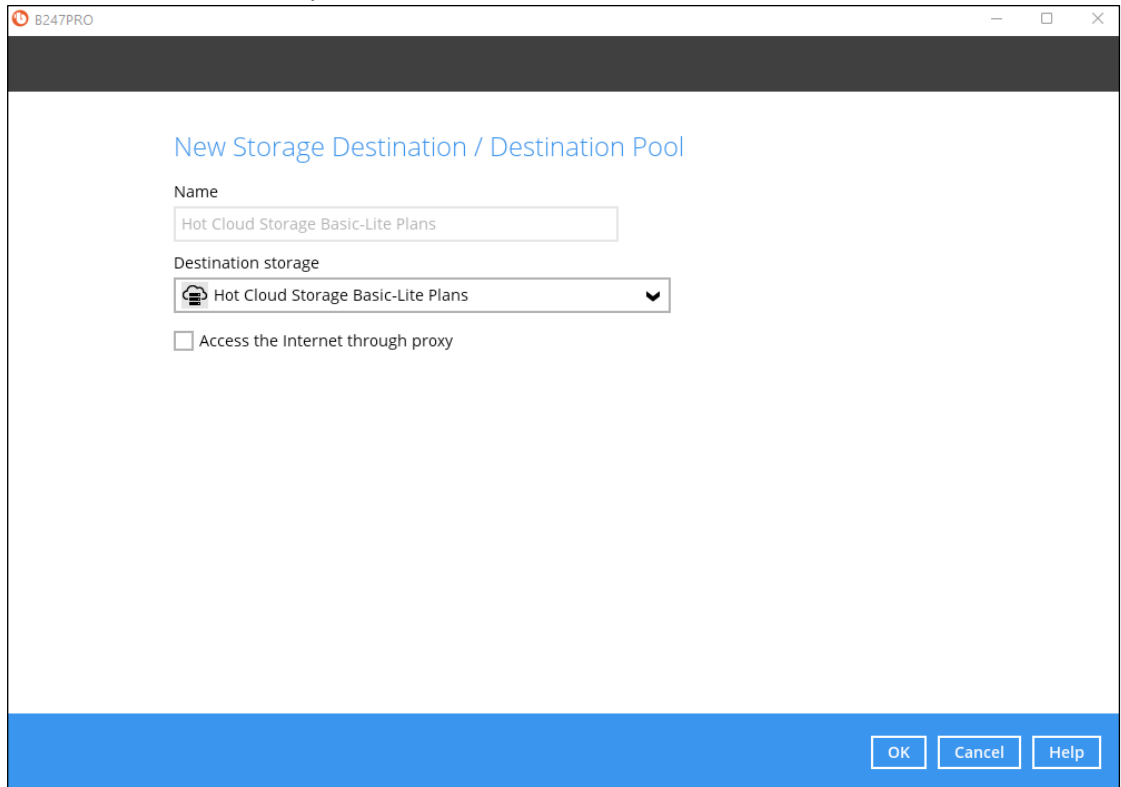

7. Click  to create the Backup Set.

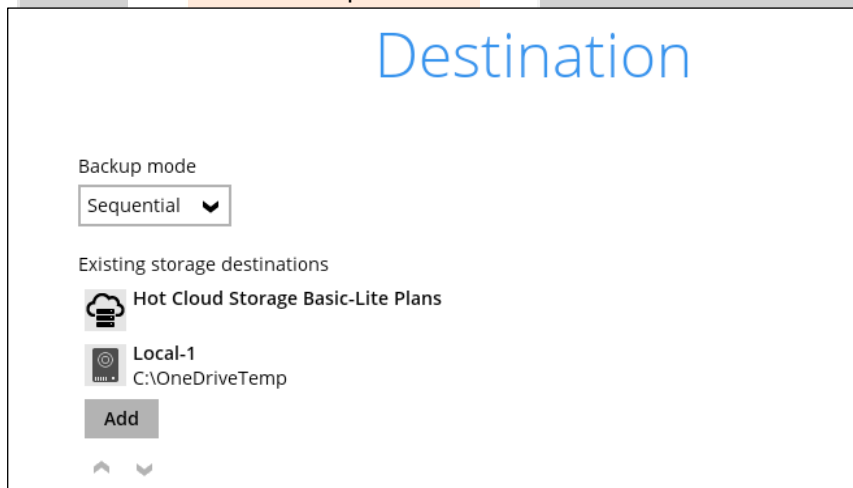

8. Click on the backup set you just created.

User Profile

Backup Set

Settings

Report

Statistics

Effective Policy


Manage Backup Set ?

<input type="checkbox"/>	Name	Type	Version	Owner	Execute Job
<input type="checkbox"/>	MySQL Database Backup (1643961170365)		--	--	--

X ?



Go to **Others** and input the path of your temporary directory. It is recommended to check the box beside **Remove temporary files after backup** to make sure the spooled database files are cleaned up after each backup job to free up space on the temporary drive. Otherwise, if the temporary drive runs out of space the database backup job will not run.

You can also change the settings for the **Compressions**. Click  once done.

General	<h3>Temporary Directory</h3> <p>Temporary directory for storing backup files</p> <input type="text" value="/temp"/> <p><input checked="" type="checkbox"/> Remove temporary files after backup</p> <hr/> <h3>Compressions</h3> <p>Select compression type</p> <input type="text" value="Fast with optimization for local"/> <hr/> <h3>Encryption</h3> <p>Encryption settings have not been configured yet</p>
Source	
Backup Schedule	
Destination	
Deduplication	
Retention Policy	
Command Line Tool	
Bandwidth Control	
IP Allowed for Restore	
Others	

- Open ssh session in the Linux machine and execute the RunConfigurator.sh script. The Login Menu will be displayed. Select (1) . **Login** then press Enter to login. Input your Login Name and Password. Set the encryption setting for the backup set.

```
# cd /usr/local/B247Pro/bin
# sh RunConfigurator.sh
Startup Backup247 Online Backup Manager ...
Config file found

Login Menu
-----
(1). Login
(2). Change Network Settings
(3). Forgot Password
(4). Quit
-----
Your Choice: 1

Login Name : LinuxTest_1
Password : *****

Please wait while verifying user account with server...
Your profile has been downloaded and updated.

Encryption setting has not been defined for backup set "MySQL
Database Backup"
Do you want to set the encryption setting for this backup set?
(Y/N) ? Y
Enable Encryption (Y/N) ? Y

Choose Encryption Type
-----
(1). Default
(2). User password
(3). Custom
-----
```

Your Choice: 2

10. Edit the backup set created from B247CBS to add the MySQL Password. Select (1) .

List Backup Sets to list the backup set.

```

Main Menu
-----
(1). List Backup Sets
(2). Delete Backup Set
(3). Export Backup Set Settings to XML
(4). Import Backup Set Settings from XML
(5). Generate new Backup Set Settings Template
(6). Change Language [English]
(7). Update Profile Settings
(8). Quit
-----
Your Choice: 1
    
```

11. Select the backup set to show the details by selecting (1) . **Name of your backup set**

```

Select a Backup Set to show more details
-----
(1). MySQL Database 1
-----
Your Choice: 1

Name           : MySQL Database Backup
Owner          : mysql8x-centos74
Type           : MySQL
Selected Source : MySQL/test
Selected Source : MySQL/world
Deselected Source : MySQL/information_schema
Deselected Source : MySQL/performance_schema
Destination Name : B247CBS, Type: OBS
Encryption Key  : abc123$%
Encryption Algorithm : AES
Encryption Mode : CBC
Encryption Key Length: 256

Press Enter to continue...
    
```

12. Export the backup set to XML by selecting (3) . **Export Backup Set Setting to XML**

```

Main Menu
-----
(1). List Backup Sets
(2). Delete Backup Set
(3). Export Backup Set Settings to XML
(4). Import Backup Set Settings from XML
(5). Generate new Backup Set Settings Template
(6). Change Language [English]
(7). Update Profile Settings
(8). Quit
-----
Your Choice: 3

Choose your backup set to generate XML file
-----
(1). MySQL Database Backup
-----
Your Choice: 1
    
```



```
XML file successfully exported to /root/.B247Pro/config/backupSet.xml
```

13. Exit from the Main Menu then edit the XML file by using an editor like vi. Add the Value data for **MySQL Password** to the file then save.

```
# cd /root/.B247Pro/config
# vi backupSet.xml

<!-- MySQL Password -->
  <Value data="abc123%" name="Password" type="string" />
```

NOTE

Please refer to [Appendix B](#) for details on the field to be configured.

14. Import the backup set by selecting **(4)**. **Import Backup Set Setting from XML**. Confirm overwrite of file.

```
Main Menu
-----
(1). List Backup Sets
(2). Delete Backup Set
(3). Export Backup Set Settings to XML
(4). Import Backup Set Settings from XML
(5). Generate new Backup Set Settings Template
(6). Change Language [English]
(7). Update Profile Settings
(8). Quit
-----
Your Choice: 4

Backup Set 'MySQL Database Backup' already exist. Confirm overwrite?
(Y/N) ? Y
XML imported, uploading to server...

XML successfully uploaded to server
```

15. Check in B247CBS web console if MySQL Password and Encryption setting was successfully added.

General

Source

Backup Schedule

Destination

Deduplication

Retention Policy

Command Line Tool

Bandwidth Control

IP Allowed for Restore

Others

General

ID
1643961170365

Name

Owner
localhost.localdomain

Backup set type

MySQL Server

Login ID

Password

Host Port

Path to mysqldump

X ?

General

Source

Backup Schedule

Destination

Deduplication

Retention Policy

Command Line Tool

Bandwidth Control

IP Allowed for Restore

Others

Temporary Directory

Temporary directory for storing backup files

Remove temporary files after backup

Compressions

Select compression type

Encryption

Backup user password is used as the encrypting key since "User Password" encryption type has been applied to this backup set

Encrypting key *****

Algorithm	AES
Method	CBC
Key length	256

X ?

3.2 Create a MySQL Database Backup Set using command line

1. To create a MySQL database backup set, select (5) . **Generate new Backup Set Settings Template** from the menu.

```

Main Menu
-----
(1). List Backup Sets
(2). Delete Backup Set
(3). Export Backup Set Settings to XML
(4). Import Backup Set Settings from XML
(5). Generate new Backup Set Settings Template
(6). Change Language [English]
(7). Update Profile Settings
(8). Quit
-----
Your Choice: 5
  
```

2. Select (2) . **MySQL Database** to generate a MySQL Database Backup Set template file to `/root/.B247Pro/config` directory.

```

Choose a template from a backup set type
-----
(1). File
(2). MySQL Database
(3). MariaDB
(4). Oracle Database Server
(4). IBM Domino
-----
Your Choice: 2

XML file successfully exported to /root/.B247Pro/config/backupSet.xml

Main Menu
-----
(1). List Backup Sets
(2). Delete Backup Set
(3). Export Backup Set Settings to XML
(4). Import Backup Set Settings from XML
(5). Generate new Backup Set Settings Template
(6). Change Language [English]
(7). Update Profile Settings
(8). Quit
-----
Your Choice:
  
```

3. **Configuring MySQL Backup Set Settings.**

To configure the MySQL backup set setting you need to edit the `/root/.B247Pro/config/backupSet.xml` file using a text editor, for example vi

You can either quit the RunConfigurator.sh script or open a new ssh session to edit the backupSet.xml file.

Please refer to Appendix A, B, C, and D for details and examples on how to create backup sets using the `backupSet.xml` file.

NOTES

- i. Before importing the backupSet.xml file please remove any unused destinations and backup schedule settings. Otherwise, the following error will be displayed **"Failed to import XML file (Reason: Value of name is empty!)"** when trying to import the backupSet.xml file.
- ii. Setup of the following cloud storage destinations: OneDrive, OneDrive for Business, DropBox and Google Drive are not supported in Linux CLI environment, as these cloud storage destinations require authentication using a web browser.

4. Importing the updated backupSet.xml file to Backup247 Advanced Client (B247PRO)

After you have edited the backupSet.xml file with your chosen backup settings you need to import the settings back to Backup247 Advanced Client (B247PRO) , so they can be uploaded to B247CBS backup server to create the backup set.

For example: to create a new MySQL backup set called “MySQL Database 1” with encryption enabled and default encryption settings.

```
Main Menu
-----
(1). List Backup Sets
(2). Delete Backup Set
(3). Export Backup Set Settings to XML
(4). Import Backup Set Settings from XML
(5). Generate new Backup Set Settings Template
(6). Change Language [English]
(7). Update Profile Settings
(8). Quit
-----
Your Choice: 4

New backup set created.
Enable Encryption (Y/N) ? y

Choose Encryption Type
-----
(1). Default
(2). User password
(3). Custom
-----
Your Choice: 1

XML imported, uploading to server...
XML successfully uploaded to server
```

5. Verify the Backup Set Settings

To verify the uploaded backup set settings are correct select (1) . **List Backup Sets** and then select the backup you wish to verify, for example backup set named “MySQL Database 1”.

```
Main Menu
-----
(1). List Backup Sets
(2). Delete Backup Set
(3). Export Backup Set Settings to XML
(4). Import Backup Set Settings from XML
(5). Generate new Backup Set Settings Template
(6). Change Language [English]
(7). Update Profile Settings
(8). Quit
-----
Your Choice: 1

Select a Backup Set to show more details
-----
(1). MySQL Database 1
-----
Your Choice: 1

Name           : MySQL Database 1
Owner          : mysql8x-centos74
Type           : MySQL
```

```
Selected Source      : MySQL/test
Selected Source      : MySQL/world
Deselected Source   : MySQL/information_schema
Deselected Source   : MySQL/performance_schema
Deselected Source   : MySQL/mysql
Destination Name     : B247CBS, Type: OBS
Encryption Key       : abc123$%
Encryption Algorithm : AES
Encryption Mode      : CBC
Encryption Key Length: 256

Press Enter to continue...
```

Congratulations! The backup set configuration is now complete!


NOTES

- i. We would like to stress that it is very important to keep a separate record of your encryption key in a safe place, as you will not be able to restore your data without the correct key.
- ii. If you re-install Backup247 Advanced Client (B247PRO) or install Backup247 Advanced Client (B247PRO) on another machine, the encryption key will be required for restoring data from the backup set.

4 Overview on the Backup Process

The following steps are performed during a MySQL Database backup job. For an overview of the detailed process for Steps 3, 5, 11, and 13, please refer to Chapter 8 of the Backup247 Advanced Client (B247PRO) v9 Quick Start Guide for Linux (CLI).

- Periodic Data Integrity Check (PDIC) Process (**Step 3**)
- Backup Set Index Handling Process
 - Start Backup Job (**Step 5**)
 - Completed Backup Job (**Step 13**)
- Data Validation Check Process (**Step 11**)

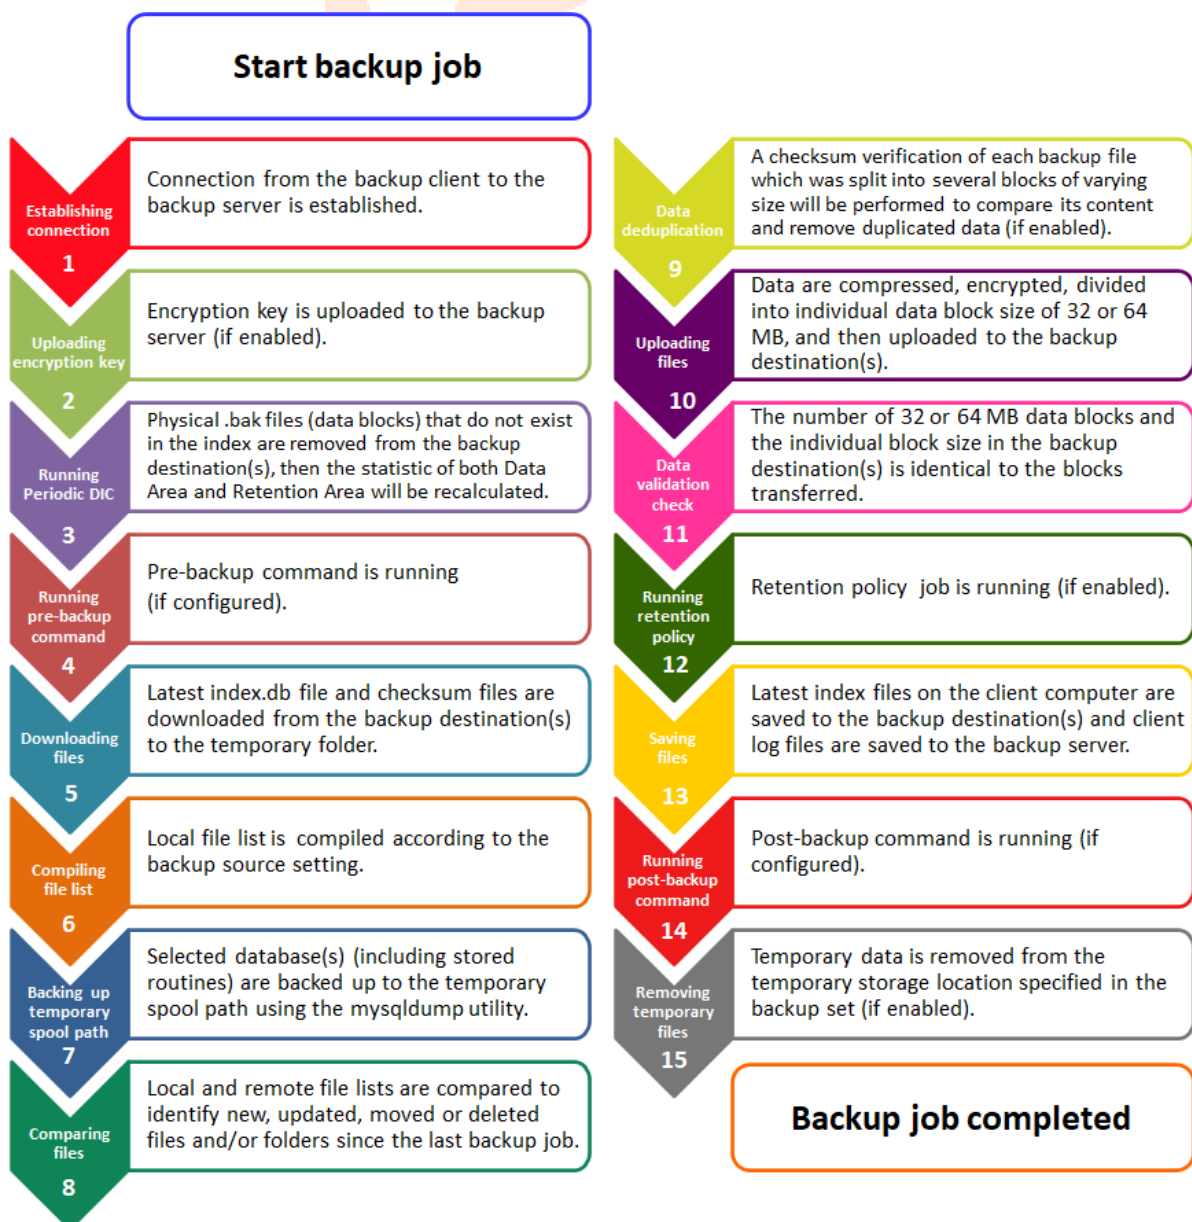


5 Running Backup Jobs

Use the `RunBackupSet.sh` script to start a backup job manually.

Example: `RunBackupSet.sh`

```
#cd /usr/local/B247Pro/bin
#sh RunBackupSet.sh "MySQL Database Backup"
-
Using APP_HOME      : /usr/local/B247Pro
Using SETTING_HOME  :
Using JAVA_HOME     : /usr/local/B247Pro/jvm
Using JAVA_EXE      : /usr/local/B247Pro/jvm/bin/java
Using JAVA_OPTS     : -Xrs -Xms128m -Xmx2048m -XX:MaxDirectMemorySize=512m -
client -Dsun.nio.PageAlignDirectMemory=true
Using JNI_PATH      : -Djava.library.path=.
Using CLASSPATH     : ../cb.jar
-
Running Backup Set - 'MySQL Database 1' ...
[2022/02/04 16:32:47] [info] [-] Start [ Backup247 Advanced Client (B247PRO)
v9.1.0.0 ]
[2022/02/04 16:32:47] [info] [-] Saving encrypted backup set encryption keys
to server...
[2022/02/04 16:32:48] [info] [1643961256911] Start Backup ... Database
[Deduplication: enabled, Deduplication scope: All files within the same
backup set, Migrate Delta: disabled]
[2022/02/04 16:32:48] [info] [1643961256911] Using Temporary Directory
/temp/1643961170365/OBS@1643961256911
[2022/02/04 16:32:50] [info] [-] Start running pre-commands
[2022/02/04 16:32:50] [info] [-] Finished running pre-commands
[2022/02/04 16:32:50] [info] [-] [Start] Backing up database "test" to
"/temp/1643961170365/SpoolArea/MySQL/test.sql"
[2022/02/04 16:32:51] [info] [-] [End]
[2022/02/04 16:32:51] [info] [-] [Start] Backing up database "world" to
"/temp/1643961170365/SpoolArea/MySQL/world.sql"
[2022/02/04 16:32:51] [info] [-] [End]
[2022/02/04 16:32:51] [info] [-] Start running post-commands
[2022/02/04 16:32:51] [info] [-] Finished running post-commands
[2022/02/04 16:33:00] [info] [1643961256911] Downloading server file list...
[2022/02/04 16:33:01] [info] [1643961256911] Downloading server file list...
Completed
[2022/02/04 16:33:02] [info] [1643961256911] Reading backup source from hard
disk...
[2022/02/04 16:33:02] [info] [1643961256911] Reading backup source from hard
disk... Completed
[2022/02/04 16:33:02] [info] [1643961256911] [New Directory]... MySQL
[2022/02/04 16:33:02] [info] [1643961256911] [New File]... 100% of
"MySQL/test.sql"
[2022/02/04 16:33:02] [info] [1643961256911] [New File]... 100% of
"MySQL/world.sql"
[2022/02/04 16:33:03] [info] [1643961256911] Start validating the presence
and size of backup data in destination "B247CBS"...
[2022/02/04 16:33:03] [info] [1643961256911] File:
"1643961170365/blocks/2022-02-04-16-32-38/0/000000.bak", Size: 800, OK
[2022/02/04 16:33:03] [info] [1643961256911] File:
"1643961170365/blocks/2022-02-04-16-32-38/0/000001.bak", Size: 784, OK
[2022/02/04 16:33:03] [info] [1643961256911] Finished validating the
presence and size of backup data in destination "B247CBS"
[2022/02/04 16:33:03] [info] [1643961256911] Total New Files = 2
[2022/02/04 16:33:03] [info] [1643961256911] Total New Directories = 1
[2022/02/04 16:33:03] [info] [1643961256911] Total New Links = 0
[2022/02/04 16:33:03] [info] [1643961256911] Total Updated Files = 0
[2022/02/04 16:33:03] [info] [1643961256911] Total Deleted Files = 0
[2022/02/04 16:33:03] [info] [1643961256911] Total Deleted Directories = 0
[2022/02/04 16:33:03] [info] [1643961256911] Total Deleted Links = 0
[2022/02/04 16:33:03] [info] [1643961256911] Total Moved Files = 0
```

```
[2022/02/04 16:33:03] [info] [1643961256911] Total Dedupe Saving for this
job = 0B
[2022/02/04 16:33:03] [info] [1643961256911] Total Backup Data Size for this
job = 6KB
[2022/02/04 16:33:03] [info] [1643961256911] Total Dedupe Saving for
destination = 0B
[2022/02/04 16:33:03] [info] [1643961256911] Total Backup Data Size for
destination = 6KB
[2022/02/04 16:33:04] [info] [-] Deleting temporary file
/temp/1643961170365/SpoolArea
[2022/02/04 16:33:04] [info] [-] Saving server information to destination.
[2022/02/04 16:33:04] [info] [1643961256911] Saving encrypted backup file
index to 1643961170365/blocks/2022-02-04-16-32-38 at destination B247CBS...
[2022/02/04 16:33:07] [info] [1643961256911] Deleting temporary file
/temp/1643961170365/OBS@1643961256911
[2022/02/04 16:33:07] [info] [1643961256911] Backup Completed Successfully
```



6 Restoring Data

There are two options to restore a MySQL Database Backup Set for Linux using the **Restore.sh** script.

- Automatic MySQL Database Restore

This is recommended for restore of MySQL databases on the original MySQL server.

For this option, the `RESTORE_TO=""` parameter in the `Restore.sh` script should be left blank or empty.

The MySQL database `.sql` files are restored from your backup destination to the MySQL database server. The restored MySQL database `.sql` files are then automatically applied to the MySQL database server.

- Manual MySQL Database Restore

This is recommended for restore of MySQL databases on a different MySQL server.

For this option, the `RESTORE_TO=""` parameter in the `Restore.sh` script should contain a location on the MySQL server.

The MySQL database `.sql` files are only restored from your backup destination to the location specified in `RESTORE_TO=""` parameter, e.g. `RESTORE_TO="/restored_file"`. The restored MySQL database `.sql` files then need to be separately applied to the MySQL database instance using the "source" command.

6.1 Automatic MySQL Database Restore

1. To restore files from your backup destination and automatically apply them to the MySQL database server.

You need to use the `Restore.sh` script by using a text editor like `vi` to configure the restore settings like :

- Backup Set Name -> `BACKUP_SET=""`
- Backup Destination -> `DESTINATION=""`
- Files/Folders to be Restored -> `RESTORE_FROM=""`
- Snapshot to be restored -> `POINT_IN_TIME=""`
- Applying the original permission to the restore files -> `RESTORE_PERMISSION=""`
- Verifying the in-file delta file checksum -> `VERIFY_CHKSUM=""`

NOTES

- `RESTORE_TO=""` settings must be blank
- To configure the shell script, press **Esc + I**. You will see this `-- INSERT --` on the lower left corner of the terminal.

```

# cd /usr/local/B247Pro/bin
# vi Restore.sh

#!/bin/sh

##### Restore.sh
#####
# You can use this shell script to restore backup files using command-
line.#
# Just customize the "User Define Section" below with values for your
#
# restore action.
#
#####

##### Start: User Defined Section
#####

# ----- BACKUP_SET -----
-
# | The name or ID of the backup set that you want to restore.
|
# | If backup set name is not in English, please use ID instead.
|
# | e.g. BACKUP_SET="1119083740107"
|
# | or BACKUP_SET="FileBackupSet-1"
|
# |
|
# | You can leave this parameter blank if you have only 1 backupset.
|
# -----
-
BACKUP_SET="MySQL Database 1"

# ----- DESTINATION -----
-
# | The name or ID of the backup destination that you want to restore
from.|
# | If backup destination name is not in English, please use ID instead.
|
# | e.g. DESTINATION="1740107119083"
|
# | or DESTINATION="Destination-1"
|
# |
|
# | You can leave this parameter blank if you have only 1 destination.
|
# -----
-
DESTINATION=""

# ----- RESTORE_TO -----
-
# | Directory to where you want files to be restored
|
# | set to "" to restore files to original location
|
# | e.g. RESTORE_TO="/tmp"
|
# -----
-
RESTORE_TO=""

```

```
# ----- RESTORE_FROM -----
# | File/Directory on the backup server that you would like to restore
# | e.g. RESTORE_FROM="/Data"
# -----
RESTORE_FROM="MySQL"

# ----- POINT_IN_TIME -----
# | The point-in-time snapshot (successful backup) that you want to
restore|
# | from the backup server. Use "Current" for the latest backup snapshot
# | e.g. POINT_IN_TIME="2006-10-04-12-57-13"
# | or POINT_IN_TIME="Current"
# |
# | You can retrieve the point in time by using the ListBackupJob.sh
# -----
POINT_IN_TIME="Current"

# ----- RESTORE_PERMISSION -----
# | set to "Y" if you want to restore file permissions
# | set to "N" if you do NOT want to restore file permissions
# -----
RESTORE_PERMISSION="N"

# ----- SKIP_INVALID_KEY -----
# | set to "Y" if you want to skip restore file with invalid key
# | set to "N" if you want to prompt user to input a correct key
# -----
SKIP_INVALID_KEY="N"

# ----- SYNC_OPTION -----
# | Delete extra files
# | set to "Y" if you want to enable sync option
# | set to "N" if you do NOT want to enable sync option
# | set to "" to prompt for selection
# -----
SYNC_OPTION="N"

# ----- REPLACE_EXISTING_FILE -----
# | set to "--all" to replace all existing file(s) of the same filename
|
```

```

# | set to "--none" to skip all existing file(s) with the same filename
|
# | set to "" to prompt for selection
|
# -----
-
REPLACE_EXISTING_FILE="--all"

# -----          SETTING_HOME          -----
-
# | Directory to your setting home.
|
# | Default to ${HOME}/.B247Pro when not set.
|
# | e.g. SETTING_HOME="${HOME}/.B247Pro"
|
# -----
-
SETTING_HOME=""

# -----          FILTER          -----
-
# | Filter out what files you want to restore
|
# | -Pattern=xxx-Type=yyy-Target=zzz
|
# | where xxx is the filter pattern,
|
# | yyy is the filter type, which can be one of the following:
|
# | [exact | exactMatchCase | contains | containsMatchCase |
|
# | startWith | startWithMatchCase | endWith |
endWithMatchCase]
# | zzz is the filter target, which can be one of the following:
|
# | [toFile | toFileDir | toDir]
|
# |
|
# | e.g. FILTER="-Pattern=.txt-Type=exact-Target=toFile"
|
# -----
-
FILTER=""

# -----          TEMP_DIR          -----
-
# | Directory to where you want to store restore files temporarily
|
# | set to "" to use the temporary directory in the backup set
|
# | e.g. TEMP_DIR="/tmp"
|
# -----
-
TEMP_DIR="/temp"

# -----          VERIFY_CHKSUM          -----
-
# | set to "Y" if you want to verify in-file delta file checksum during
restore|
# | set to "N" if you do NOT want to verify in-file delta file checksum
during |
# | restore
|
# -----
-

```

```

VERIFY_CHKSUM="N"

##### END: User Defined Section
#####

#####
#
#   R E T R I E V E           A P P _ H O M E           P A T H
#
#####
#

```

2. After the **Restore.sh** script is configured the files can be restored automatically to the MySQL Database Server.

```

# cd /usr/local/B247Pro/bin
# sh Restore.sh
Using APP_HOME:           : /usr/local/B247Pro
Using BACKUP_SET          : MySQL Database 1
Using RESTORE_FROM       : MySQL
Using RESTORE_TO          :
Using POINT_IN_TIME      : Current
Using RESTORE_PERMISSION : N
Using TEMP_DIR            : /temp
Filter Pattern not set, filter would not apply to restore
[2022-02-04 16:47:12] Start [ Backup247 Advanced Client (B247PRO) v9.1.0.0]
[2022-02-04 16:47:12] OS: Linux 3.10.0-1062.12.1.el7.x86_64
(localhost.localdomain); CPU Model: VMware-Intel(R) Xeon(R) Gold 5218R CPU
@ 2.10GHz,Intel(R) Xeon(R) Gold 5218R CPU @ 2.10GHz; Number of Processors:
4; Heap Size: 63.7MB (Current) / 1.8GB (Maximum); Physical Memory: 1.1GB
(Free) / 3.7GB (Total)
[2022-02-04 16:47:12] start,Start [ Backup247 Advanced Client (B247PRO)
v9.1.0.0 ],0,0,0,,0,0

[2022-02-04 16:47:12] Selected job: 2022-02-04-16-47-05
[2022-02-04 16:47:12] Selected source: [MySQL]
[2022-02-04 16:47:12] Info: [followLink=false marshalTargetPath=false
deleteForSync=false skipFaultKey=false verifyDeltaFileChecksum=false
ignoreSegmentInfoCorruptedData=true restorePermission=false
[RestoreLocation] type=ORIGINAL path=[null]]
[2022-02-04 16:47:13] Downloading...
"/temp/RestoreSet/1643961170365/RestoreDatabase/MySQL/test.sql" (Total 3K
bytes)
[2022-02-04 16:47:13] Downloading...
"/temp/RestoreSet/1643961170365/RestoreDatabase/MySQL/world.sql" (Total 3K
bytes)
[2022-02-04 16:47:14] Start restore files to MySQL Server... "world"
[2022-02-04 16:47:14] Restoring to MySQL Server Database... "world"
[2022-02-04 16:47:14] End restore files to MySQL Server... "world"
[2022-02-04 16:47:14] Start restore files to MySQL Server... "test"
[2022-02-04 16:47:14] Restoring to MySQL Server Database... "test"
[2022-02-04 16:47:15] End restore files to MySQL Server... "test"
[2022-02-04 16:47:16] Restore Completed Successfully
[2022-02-04 16:47:16] end,RESTORE_STOP_SUCCESS,0,0,0,,0,0

```

3. Log in to MySQL server to check the database status.

Example: Listing the tables in the database using **show tables**

```
mysql> show databases;
+-----+
| Database          |
+-----+
| information_schema |
| mysql             |
| performance_schema |
| sys              |
| test              |
| world            |
+-----+
6 rows in set (0.00 sec)

mysql> show tables in test;
+-----+
| Tables_in_test    |
+-----+
| table1            |
| table2            |
| table3            |
| table4            |
| table5            |
+-----+
5 rows in set (0.01 sec)

mysql> show tables in world;
+-----+
| Tables_in_world   |
+-----+
| city              |
| country           |
| countrylanguage  |
+-----+
3 rows in set (0.00 sec)

mysql>
```

6.2 Manual MySQL Database Restore

To restore files that have been backed up from your backup destination, you need to use the Restore.sh script by using a text editor like vi to configure the restore settings like:

- Backup Set Name -> BACKUP_SET=""
- Backup Destination -> DESTINATION=""
- Location of Restored Files -> RESTORE_TO=""
- Files/Folders to be Restored -> RESTORE_FROM=""
- Snapshot to be restored ->POINT_IN_TIME=""
- Applying the original permission to the restore files ->RESTORE_PERMISSION=""
- Verifying the in-file delta file checksum ->VERIFY_CHKSUM=""

```
# sh Restore.sh
Using APP_HOME:           : /usr/local/B247Pro
Using BACKUP_SET          : MySQL Database 1
Using RESTORE_FROM        : MySQL
Using RESTORE_TO          : /root/restored
Using POINT_IN_TIME       : Current
Using RESTORE_PERMISSION : N
Using TEMP_DIR            : /temp
Filter Pattern not set, filter would not apply to restore
[2022-02-04 16:58:07] Start [ Backup247 Advanced Client (B247PRO)
v9.1.0.0]
[2022-02-04 16:58:07] OS: Linux 3.10.0-1062.12.1.el7.x86_64
(localhost.localdomain); CPU Model: VMware-Intel(R) Xeon(R) Gold 5218R CPU
@ 2.10GHz,Intel(R) Xeon(R) Gold 5218R CPU @ 2.10GHz; Number of Processors:
4; Heap Size: 63.1MB (Current) / 1.8GB (Maximum); Physical Memory: 917.7MB
(Free) / 3.7GB (Total)
[2022-02-04 16:58:07] start,Start [ Backup247 Advanced Client (B247PRO)
v9.1.0.0 ],0,0,0,,0,0

[2022-02-04 16:58:07] Selected job: 2022-02-04-16-58-00
[2022-02-04 16:58:07] Selected source: [MySQL]
[2022-02-04 16:58:07] Info: [followLink=false marshalTargetPath=false
deleteForSync=false skipFaultKey=false verifyDeltaFileChecksum=false
ignoreSegmentInfoCorruptedData=true restorePermission=false
[RestoreLocation] type=RAW path=[/root/restored]]
[2022-02-04 16:58:08] Downloading... "/root/restored/MySQL/test.sql"
(Total 3K bytes)
[2022-02-04 16:58:08] Downloading... "/root/restored/MySQL/world.sql"
(Total 3K bytes)
[2022-02-04 16:58:09] [PostRestoreMySQLTask.run]
Path=/root/restored/MySQL/test.sql Error= null
[2022-02-04 16:58:09] [PostRestoreMySQLTask.run]
Path=/root/restored/MySQL/world.sql Error= null
[2022-02-04 16:58:10] Restore completed with error(s)
[2022-02-04 16:58:10] end,RESTORE_STOP_SUCCESS_WITH_ERROR,0,0,0,,0,0
```

Verify the files are restored on the machine.

```
# ls -la /root/restored/MySQL
total 16
drwxr-xr-x. 2 root root  43 Feb  4 11:19 .
drwxr-xr-x. 3 root root  19 Feb  4 10:35 ..
-rwxr-xr-x. 1 root root 5650 Feb  4 11:17 test.sql
-rwxr-xr-x. 1 root root 5551 Feb  4 11:17 world.sql
```

Recovering MySQL Databases

1. Log in to MySQL server.

```
# mysql -u root -p
Enter password:
Welcome to the MySQL monitor.  Commands end with ; or \g.
Your MySQL connection id is 108
Server version: 5.7.24 MySQL Community Server (GPL)

Copyright (c) 2000, 2018, Oracle and/or its affiliates. All rights
reserved.

Oracle is a registered trademark of Oracle Corporation and/or its
affiliates. Other names may be trademarks of their respective
owners.

Type 'help;' or '\h' for help. Type '\c' to clear the current input
statement.

mysql> show databases;
+-----+
| Database |
+-----+
| information_schema |
| mysql |
| performance_schema |
| sys |
+-----+
4 rows in set (0.09 sec)

mysql>
```

2. Create the database names that need to be recovered.

Example: employees, and test

```
mysql> create database test;
Query OK, 1 row affected (0.00 sec)

mysql> create database world;
Query OK, 1 row affected (0.00 sec)
```

3. Recover Databases

Repeat the following steps for all databases you wish to restore.

```
mysql> use test;
Database changed
mysql> source /root/restored/MySQL/test.sql;
Query OK, 0 rows affected (0.00 sec)

Query OK, 0 rows affected (0.00 sec)

Query OK, 0 rows affected (0.00 sec)

mysql> use world;
Database changed
mysql> source /root/restored/MySQL/world.sql;
Query OK, 0 rows affected (0.00 sec)

Query OK, 0 rows affected (0.00 sec)

Query OK, 0 rows affected (0.00 sec)
```


4. Check the database status

Example: Listing the tables in the database using **show tables**

```
mysql> show databases;
+-----+
| Database |
+-----+
| information_schema |
| mysql |
| performance_schema |
| sys |
| test |
| world |
+-----+
6 rows in set (0.00 sec)

mysql> show tables in test;
+-----+
| Tables_in_test |
+-----+
| table1 |
| table2 |
| table3 |
| table4 |
| table5 |
+-----+
5 rows in set (0.01 sec)

mysql> show tables in world;
+-----+
| Tables_in_world |
+-----+
| city |
| country |
| countrylanguage |
+-----+
3 rows in set (0.00 sec)

mysql>
```


7 Contact Backup247

7.1 Technical Assistance

To contact Backup247 support representatives for technical assistance, visit our website <https://backup247.com.au/Support.php>

7.2 Documentation

Documentations for all Backup247 modules, user guide and QuickStart are available on our website. Alternatively, email us on support@backup247.com.au for technical demo.



Appendix

Appendix A MySQL Backup Set XML Template (Raw)

```
<?xml version="1.0" encoding="UTF-8"?>
<Setting>
  <!-- This is the backup set setting -->
  <Key name="Backup Set Setting" allowMultiple="Y">
    <!-- Backup set type (Read Only) -->
    <Value data="MySQL" name="Type" type="string" />
    <!-- Backup set name -->
    <Value data="" name="Name" type="string" />
    <!-- Temporary directory for storing backup files -->
    <Value data="" name="Temporary Working Directory" type="string" />
    <!-- Remove temporary files after backup -->
    <!-- Y: Yes -->
    <!-- N: No -->
    <Value data="Y" name="Delete temporary files after backup"
      type="boolean" />
    <!-- Select compression type -->
    <!-- GzipDefaultCompression : Normal -->
    <!-- GzipBestSpeedCompression: Fast (Compressed size larger than normal)-
    -->
    <!-- SnappyDefaultCompression: Fast with optimization for local -->
    <!-- Leave the field blank for no compression -->
    <Value data="" name="Compression Type" type="string" />
    <!-- This shows the MySQL Database setting -->
    <Key name="MySQL Database Setting">
      <!-- MySQL Login Name -->
      <Value data="" name="Username" type="string" />
      <!-- MySQL Password -->
      <Value data="" name="Password" type="string" />
      <!-- MySQL Host -->
      <Value data="" name="Host" type="string" />
      <!-- MySQL Port -->
      <Value data="" name="Port" type="string" />
      <!-- Path to mysqldump -->
      <Value data="" name="mysqldump path" type="string" />
    </Key>
    <!-- This includes the database you want to backup -->
    <!-- Copy and paste the whole <Key> to add more selected sources -->
    <Key name="Selected Source" allowMultiple="Y">
      <!-- Please enter the path in the format of "MySQL/_YOUR_FILE_NAME_" -
      -->
      <Value data="" name="Path" type="string" />
    </Key>
    <!-- This excludes the database from the included source -->
    <!-- Copy and paste the whole <Key> to add more deselected sources -->
    <Key name="Deselected Source" allowMultiple="Y">
      <!-- Please enter the path in the format of "MySQL/_YOUR_FILE_NAME_" -
      -->
      <Value data="" name="Path" type="string" />
    </Key>
    <!-- Settings for your scheduled backups -->
    <Key name="Schedule Settings">
      <!-- Enable scheduled backup on this computer -->
      <!-- Y: Yes -->
      <!-- N: No -->
      <Value data="N" name="Enable" type="boolean" />
      <!-- Daily settings -->
      <!-- Copy and paste the whole <Key> to add more daily schedules -->
      <Key name="Daily Schedule Settings" allowMultiple="Y">
        <!-- Name of schedule -->
        <Value data="Daily-Schedule" name="Name" type="string" />
        <!-- Start hour -->
```

```

<!-- 0, 1, 2... 23 -->
<!-- This value will be ignored if the schedule is set to be
periodic ("Interval" field contains value other than -1) -->
<Value data="21" name="Hour" type="integer" />
<!-- Start minute -->
<!-- 0, 1, 2... 59 -->
<!-- This value will be ignored if the schedule is set to be
periodic ("Interval" field contains value other than -1) -->
<Value data="0" name="Minute" type="integer" />
<Value data="0" name="Minute" type="integer" />
<!-- Interval -->
<!-- 1 : 1 minute -->
<!-- 2 : 2 minutes -->
<!-- 3 : 3 minutes -->
<!-- 4 : 4 minutes -->
<!-- 5 : 5 minutes -->
<!-- 6 : 6 minutes -->
<!-- 10 : 10 minutes -->
<!-- 12 : 12 minutes -->
<!-- 15 : 15 minutes -->
<!-- 20 : 20 minutes -->
<!-- 30 : 30 minutes -->
<!-- 60 : 1 hour -->
<!-- 120: 2 hours -->
<!-- 180: 3 hours -->
<!-- 240: 4 hours -->
<!-- 360: 6 hours -->
<!-- 480: 8 hours -->
<!-- 720: 12 hours -->
<!-- A value of -1 means a non-periodic normal schedule -->
<Value data="-1" name="Interval" type="integer" />
</Key>
<!-- Weekly settings -->
<!-- Copy and paste the whole <Key> to add more weekly schedules -->
<Key name="Weekly Schedule Settings" allowMultiple="Y">
  <!-- Name of schedule -->
  <Value data="Weekly-Schedule" name="Name" type="string" />
  <!-- Start hour -->
  <!-- 0, 1, 2... 23 -->
  <!-- This value will be ignored if the schedule is set to be
  periodic ("Interval" field contains value other than -1) -->
  <Value data="21" name="Hour" type="integer" />
  <!-- Start minute -->
  <!-- 0, 1, 2... 59 -->
  <!-- This value will be ignored if the schedule is set to be
  periodic ("Interval" field contains value other than -1) -->
  <Value data="0" name="Minute" type="integer" />
  <!-- Interval -->
  <!-- 1 : 1 minute -->
  <!-- 2 : 2 minutes -->
  <!-- 3 : 3 minutes -->
  <!-- 4 : 4 minutes -->
  <!-- 5 : 5 minutes -->
  <!-- 6 : 6 minutes -->
  <!-- 10 : 10 minutes -->
  <!-- 12 : 12 minutes -->
  <!-- 15 : 15 minutes -->
  <!-- 20 : 20 minutes -->
  <!-- 30 : 30 minutes -->
  <!-- 60 : 1 hour -->
  <!-- 120: 2 hours -->
  <!-- 180: 3 hours -->
  <!-- 240: 4 hours -->
  <!-- 360: 6 hours -->
  <!-- 480: 8 hours -->
  <!-- 720: 12 hours -->
  <!-- A value of -1 means a non-periodic normal schedule -->
  <Value data="-1" name="Interval" type="integer" />

```

```

<!-- Backup on these days of the week -->
<!-- Y: Yes -->
<!-- N: No -->
<Value data="Y" name="Sunday" type="boolean" />
<Value data="Y" name="Monday" type="boolean" />
<Value data="Y" name="Tuesday" type="boolean" />
<Value data="Y" name="Wednesday" type="boolean" />
<Value data="Y" name="Thursday" type="boolean" />
<Value data="Y" name="Friday" type="boolean" />
<Value data="Y" name="Saturday" type="boolean" />
</Key>
<!-- Monthly settings -->
<!-- Copy and paste the whole <Key> to add more monthly schedules -->
<Key name="Monthly Schedule Settings" allowMultiple="Y">
  <!-- Name of schedule -->
  <Value data="Monthly-Schedule" name="Name" type="string" />
  <!-- Start hour -->
  <!-- 0, 1, 2... 23 -->
  <Value data="21" name="Hour" type="integer" />
  <!-- Start minute -->
  <!-- 0, 1, 2... 59 -->
  <Value data="0" name="Minute" type="integer" />
  <!-- Schedule date of month -->
  <!-- 1, 2, 3... 31 -->
  <!-- 32: Last -->
  <!-- Set to 0 if you want to use the format of occurrence +
  criteria, e.g. Third Wednesday, instead -->
  <Value data="1" name="Schedule Date" type="integer" />
  <!-- Backup occurrence -->
  <!-- First / Second / Third / Fourth / Last -->
  <!-- If "Schedule Date" is not zero, this value will be ignored --
  >
  <Value data="First" name="Occurrence" type="string" />
  <!-- Backup criteria -->
  <!-- Sunday / Monday / Tuesday / Wednesday / Thursday / Friday /
  Saturday / Weekday / Weekend -->
  <!-- If "Schedule Date" is not zero, this value will be ignored --
  >
  <Value data="Friday" name="Criteria" type="string" />
</Key>
<!-- Custom settings -->
<!-- Copy and paste the whole <Key> to add more custom schedules -->
<Key name="Custom Schedule Settings" allowMultiple="Y">
  <!-- Name of schedule -->
  <Value data="Custom" name="Name" type="string" />
  <!-- Start hour -->
  <!-- 0, 1, 2... 23 -->
  <Value data="21" name="Hour" type="integer" />
  <!-- Start minute -->
  <!-- 0, 1, 2... 59 -->
  <Value data="0" name="Minute" type="integer" />
  <!-- Date for performing custom schedule backup -->
  <!-- Input in the format of YYYY-MM-DD -->
  <Value data="2022-2-4" name="Schedule Date" type="string" />
</Key>
</Key>
<!-- This is the collection of destinations -->
<Key name="Destination Settings">
  <Value data="1" name="concurrency-level" type="integer" />
  <!-- B247CBS destination is where the files are backup to server -->
  <Key name="B247CBS Destination Settings" allowMultiple="Y">
  </Key>
  <!-- Local destination means backup files are stored in your computer-
  -->
  <!-- Copy and paste the whole <Key> to add more local destinations -->
  <Key name="Local Destination Settings">
    <!-- Name of your destination -->
    <Value data="" name="Name" type="string" />

```

```

        <!-- Directory to store your backup files -->
        <!-- e.g. /tmp -->
        <Value data="" name="Local Path" type="string" />
    </Key>
    <!-- Hot Cloud destination for storing files -->
    <!-- Copy and paste the whole <Key> to add more Hot Cloud destinations -->
    <Key name="Hot Cloud Destination Settings" allowMultiple="Y">
        <!-- Name of your destination -->
        <Value data="" name="Name" type="string" />
        <!-- Access key -->
        <Value data="" name="Access Key" type="string" />
        <!-- Secret Key -->
        <Value data="" name="Secret Key" type="string" />
        <!-- Region -->
        <!-- us-west-1 : us-west-1 -->
        <!-- ap-northeast-1: ap-northeast-1 -->
        <!-- ap-northeast-2: ap-northeast-2 -->
        <!-- eu-central-1 : eu-central-1 -->
        <!-- eu-west-1 : eu-west-1 -->
        <!-- us-central-1 : us-central-1 -->
        <!-- us-east-1 : us-east-1 -->
        <!-- us-east-2 : us-east-2 -->
        <Value data="" name="Region" type="string" />
        <!-- Bucket to store backup data -->
        <!-- Leave the field empty to use default -->
        <Value data="" name="Bucket Name" type="string" />
        <!-- Select whether to use proxy -->
        <!-- Y: Yes -->
        <!-- N: No -->
        <Value data="N" name="Enable proxy during backup" type="boolean" />
    </Key>
    <!-- FTP destination for storing files -->
    <!-- Copy and paste the whole <Key> to add more FTP destinations -->
    <Key name="FTP Destination Settings" allowMultiple="Y">
        <!-- Name of your destination -->
        <Value data="" name="Name" type="string" />
        <!-- Host -->
        <Value data="" name="Host" type="string" />
        <!-- Port -->
        <Value data="0" name="Port" type="integer" />
        <!-- Username -->
        <Value data="" name="Username" type="string" />
        <!-- Password -->
        <Value data="" name="Password" type="string" />
        <!-- FTP directory to store backup data -->
        <!-- Leave the field empty to store to ~/Backup247 -->
        <Value data="" name="Directory" type="string" />
        <!-- Select whether to use proxy -->
        <!-- Y: Yes -->
        <!-- N: No -->
        <Value data="N" name="Enable proxy during backup" type="boolean" />
    </Key>
    <!-- This shows the deduplication setting -->
    <Key name="Deduplication Setting">
        <!-- Enable deduplication -->
        <!-- Y: Yes -->
        <!-- N: No -->
        <Value data="Y" name="Enable" type="boolean" />
        <!-- Deduplication scope -->
        <!-- F: Same file path within the same backup set -->
        <!-- B: All files within the same backup set -->
        <Value data="B" name="Deduplication level" type="string" />
    </Key>
</Key>

```

```
</Setting>
```

Appendix B

MySQL Backup Set XML Template (with explanation)

This appendix explains all configurable items with their available options, highlighted in red, in this file backup set XML scripts.

Backup Set Setting

The following items define the basic configurations of the file backup set.

- **Backup set type** – enter the backup set type, for instance, File, MySQL etc.
- **Backup set name** – name your backup set.
- **Temporary directory for storing backup files** – Enter the directory path where you would like to have the backup files stored temporarily. The temporary directory is used for various purposes, such as storage of temporary spooled file (for database specific backup type in Backup247 Advanced Client (B247PRO)), remote file list, local file list, temporary delta file and other files of temporary nature.
- **Remove temporary files after backup** – choose whether to remove temporary files after you finish backup.
- **Select compression type** – choose the backup compression mode among Normal, Fast, Fast with optimization for local or No compression.

```
<?xml version="1.0" encoding="UTF-8"?>
<Setting>
<!-- This is the backup set setting -->
  <Key name="Backup Set Setting" allowMultiple="Y">
    <!-- Backup set type (Read Only) -->
    <Value data="MySQL" name="Type" type="string" />
    <!-- Backup set name -->
    <Value data="" name="Name" type="string" />
    <!-- Temporary directory for storing backup files -->
    <Value data="" name="Temporary Working Directory"
    type="string" />
    <!-- Remove temporary files after backup -->
    <!-- Y: Yes -->
    <!-- N: No -->
    <Value data="Y" name="Delete temporary files after backup"
    type="boolean" />
    <!-- Select compression type -->
    <!-- GzipDefaultCompression : Normal -->
    <!-- GzipBestSpeedCompression: Fast (Compressed size larger
    than normal) -->
    <!-- SnappyDefaultCompression: Fast with optimization for local-->
    <!-- Leave the field blank for no compression -->
    <Value data="" name="Compression Type" type="string" />
```

MySQL Database Setting

- Configure the login and network settings for the MySQL Database.

```

<!-- This shows the MySQL Database setting -->
<Key name="MySQL Database Setting">
  <!-- MySQL Login Name -->
  <Value data="" name="Username" type="string" />
  <!-- MySQL Password -->
  <Value data="" name="Password" type="string" />
  <!-- MySQL Host -->
  <Value data="" name="Host" type="string" />
  <!-- MySQL Port -->
  <Value data="" name="Port" type="string" />
  <!-- Path to mysqldump -->
  <Value data="" name="mysqldump path" type="string" />
</Key>

```

Selected Source

- Enter the file path where the files you would like to backup are located.

```

<!-- This includes the files you want to backup -->
<!-- Copy and paste the whole <Key> to add more selected
sources -->
<Key name="Selected Source">
  <!-- Please enter your file path, e.g. /root/Documents -->
  <Value data="" name="Path" type="string" />
</Key>

```

Deselected Source

- Enter the file path where files you would like to exclude from the backup.

```

<!-- This excludes the files from the included source -->
<!-- Copy and paste the whole <Key> to add more deselected
sources -->
<Key name="Deselected Source">
  <!-- Please enter your file path, e.g. /root/Documents -->
  <Value data="" name="Path" type="string" />
</Key>

```

Schedule Settings

- Choose whether you would like backup jobs to be run at the scheduled time you set.

```

<!-- Settings for your scheduled backups -->
<Key name="Schedule Settings">
  <!-- Enable scheduled backup on this computer -->
  <!-- Y: Yes -->
  <!-- N: No -->
  <Value data="N" name="Enable" type="boolean" />

```


Daily Schedule Settings

Set backup jobs to run daily at the time you specified (start backup “at” or normal backup schedule) or at intervals of minutes/hours (start backup “every” or periodic backup schedule).

- **Name of schedule** – name of the backup schedule.
- **Start hour** – the starting hour of the backup, from 0-23. This value will apply for normal backup schedule or start backup “at”.
- **Start minute** – the starting minute of the backup, from 0-59. This value will apply for normal backup schedule or start backup “at”.
- **Interval** – frequency in minutes or hours when the backup would start, from 1-30 in minutes and 60-720 in hours. This value will apply for periodic backup schedule or start backup “every”.

```

<!-- Daily settings -->
<!-- Copy and paste the whole <Key> to add more daily
schedules -->
<Key name="Daily Schedule Settings">
  <!-- Name of schedule -->
  <Value data="Daily-Schedule" name="Name" type="string" />
  <!-- Start hour -->
  <!-- 0, 1, 2... 23 -->
  <!-- This value will be ignored if the schedule is set to be
periodic ("Interval" field contains value other than -1) -->
  <Value data="21" name="Hour" type="integer" />
  <!-- Start minute -->
  <!-- 0, 1, 2... 59 -->
  <!-- This value will be ignored if the schedule is set to be
periodic ("Interval" field contains value other than -1) -->
  <Value data="0" name="Minute" type="integer" />
  <!-- Interval -->
  <!-- 1 : 1 minute -->
  <!-- 2 : 2 minutes -->
  <!-- 3 : 3 minutes -->
  <!-- 4 : 4 minutes -->
  <!-- 5 : 5 minutes -->
  <!-- 6 : 6 minutes -->
  <!-- 10 : 10 minutes -->
  <!-- 12 : 12 minutes -->
  <!-- 15 : 15 minutes -->
  <!-- 20 : 20 minutes -->
  <!-- 30 : 30 minutes -->
  <!-- 60 : 1 hour -->
  <!-- 120: 2 hours -->
  <!-- 180: 3 hours -->
  <!-- 240: 4 hours -->
  <!-- 360: 6 hours -->
  <!-- 480: 8 hours -->
  <!-- 720: 12 hours -->
  <!-- A value of -1 means a non-periodic normal schedule -->
  <Value data="-1" name="Interval" type="integer" />
</Key>

```

Weekly Schedule Settings

Set backup jobs to run weekly at the time you specified (start backup “at” or normal backup schedule) or at intervals of minutes/hours (start backup “every” or periodic backup schedule).

- **Name of schedule** – name of the backup schedule.
- **Start hour** – the starting hour of the backup, from 0-23. This value will apply for normal backup schedule or start backup “at”.
- **Start minute** – the starting minute of the backup, from 0-59. This value will apply for normal backup schedule or start backup “at”.
- **Interval** – frequency in minutes or hours when the backup would start, from 1-30 in minutes and 60-720 in hours. This value will apply for periodic backup schedule or start backup “every”.
- **Backup on these days of the week** – choose to enable or disable backup on each day in week.

```

<!-- Weekly settings -->
<!-- Copy and paste the whole <Key> to add more weekly
schedules -->
<Key name="Weekly Schedule Settings">
  <!-- Name of schedule -->
  <Value data="Weekly-Schedule" name="Name" type="string" />
  <!-- Start hour -->
  <!-- 0, 1, 2... 23 -->
  <!-- This value will be ignored if the schedule is set to be
periodic ("Interval" field contains value other than -1) -->
  <Value data="21" name="Hour" type="integer" />
  <!-- Start minute -->
  <!-- 0, 1, 2... 59 -->
  <!-- This value will be ignored if the schedule is set to be
periodic ("Interval" field contains value other than -1) -->
  <Value data="0" name="Minute" type="integer" />
  <!-- Interval -->
  <!-- 1 : 1 minute -->
  <!-- 2 : 2 minutes -->
  <!-- 3 : 3 minutes -->
  <!-- 4 : 4 minutes -->
  <!-- 5 : 5 minutes -->
  <!-- 6 : 6 minutes -->
  <!-- 10 : 10 minutes -->
  <!-- 12 : 12 minutes -->
  <!-- 15 : 15 minutes -->
  <!-- 20 : 20 minutes -->
  <!-- 30 : 30 minutes -->
  <!-- 60 : 1 hour -->
  <!-- 120: 2 hours -->
  <!-- 180: 3 hours -->
  <!-- 240: 4 hours -->
  <!-- 360: 6 hours -->
  <!-- 480: 8 hours -->
  <!-- 720: 12 hours -->
  <!-- A value of -1 means a non-periodic normal schedule -->
  <Value data="-1" name="Interval" type="integer" />
  <!-- Backup on these days of the week -->
  <!-- Y: Yes -->
  <!-- N: No -->
  <Value data="Y" name="Sunday" type="boolean" />
  <Value data="Y" name="Monday" type="boolean" />
  <Value data="Y" name="Tuesday" type="boolean" />
  <Value data="Y" name="Wednesday" type="boolean" />
  <Value data="Y" name="Thursday" type="boolean" />
  <Value data="Y" name="Friday" type="boolean" />

```

```
<Value data="Y" name="Saturday" type="boolean" />
</Key>
```

Monthly Schedule Settings

Set backup jobs to run monthly at the time you specified.

- **Name of schedule** – name of the backup schedule
- **Start hour** – the starting hour of the backup, from 0-23.
- **Start minute** – the starting minute of the backup, from 0-59.
- **Schedule date of month** – set exact date in a month when you would like the backup to perform. Set to 0 if you would like the backup performed in a specified occurrence + criteria format, e.g. the third Wednesday in month.
- **Backup [Occurrence + Criteria] format**
You can set the backup to perform on a specified week (**Occurrence, First / Second / Third / Last**) and on a specified day of the week (**Criteria, Sun thru Sat**), for instance, the third Wednesday in a month.
 - **Backup occurrence** – set the week, i.e., First / Second / Third / Last. If you have set an exact date in the previous “Schedule date of month” configuration, this setting will be ignored.
 - **Backup criteria** – set a day of the week, i.e., Sunday thru Saturday. If you have set an exact date in the previous “Schedule date of month” configuration, this setting will be ignored.

```
<!-- Monthly settings -->
<!-- Copy and paste the whole <Key> to add more monthly
schedules -->
<Key name="Monthly Schedule Settings">
  <!-- Name of schedule -->
  <Value data="Monthly-Schedule" name="Name" type="string" />
  <!-- Start hour -->
  <!-- 0, 1, 2... 23 -->
  <Value data="21" name="Hour" type="integer" />
  <!-- Start minute -->
  <!-- 0, 1, 2... 59 -->
  <Value data="0" name="Minute" type="integer" />
  <!-- Schedule date of month -->
  <!-- 1, 2, 3... 31 -->
  <!-- 32: Last -->
  <!-- Set to 0 if you want to use the format of
  occurrence + criteria, e.g. Third Wednesday, instead -->
  <Value data="1" name="Schedule Date" type="integer" />
  <!-- Backup occurrence -->
  <!-- First / Second / Third / Fourth / Last -->
  <!-- If "Schedule Date" is not zero, this value will be
  ignored -->
  <Value data="First" name="Occurrence" type="string" />
  <!-- Backup criteria -->
  <!-- Sunday / Monday / Tuesday / Wednesday / Thursday /
  Friday / Saturday / Weekday / Weekend -->
  <!-- If "Schedule Date" is not zero, this value will be
  ignored -->
  <Value data="Friday" name="Criteria" type="string" />
</Key>
```

Custom Schedule Settings

Set backup jobs to run at the date and time you specified.

- **Name of schedule** – name of the backup schedule
- **Start hour** – the starting hour of the backup, from 0-23.
- **Start minute** – the starting minute of the backup, from 0-59.
- **Date for performing custom schedule backup** - enter a specific date when you would like the backup to perform. The date format should be in YYYY-MM-DD.

```

<!-- Custom settings -->
<!-- Copy and paste the whole <Key> to add more custom
schedules -->
<Key name="Custom Schedule Settings">
  <!-- Name of schedule -->
  <Value data="Custom" name="Name" type="string" />
  <!-- Start hour -->
  <!-- 0, 1, 2... 23 -->
  <Value data="21" name="Hour" type="integer" />
  <!-- Start minute -->
  <!-- 0, 1, 2... 59 -->
  <Value data="0" name="Minute" type="integer" />
  <!-- Date for performing custom schedule backup -->
  <!-- Input in the format of YYYY-MM-DD -->
  <Value data="2016-4-30" name="Schedule Date"
type="string" />
</Key>
</Key>

```

Destination Settings

- **B247CBS Destination Settings** – this option allows backup files to be stored on the server
- **Local Destination Settings** – this option allows backup files to be stored in your local computer. Enter the directory path where you would like the backup files to be stored.

```

<!-- This is the collection of destinations -->
<Key name="Destination Settings">
  <Value data="1" name="concurrency-level" type="integer" />
  <!-- B247CBS destination is where the files are backup to
server -->
  <Key name="B247CBS Destination Settings" allowMultiple="Y">
  </Key>
  <!-- Local destination means backup files are stored in
your computer -->
  <!-- Copy and paste the whole <Key> to add more local
destinations -->
  <Key name="Local Destination Settings">
    <!-- Name of your destination -->
    <Value data="" name="Name" type="string" />
    <!-- Directory to store your backup files -->
    <!-- e.g. /tmp -->
    <Value data="" name="Local Path" type="string" />
  </Key>

```

Deduplication setting

A checksum verification of each backup file which was split into several blocks of varying size will be performed to compare its content and identify which block is duplicated. There are 2 deduplication scope in this setting.

- **Same file path within the same backup set** – deduplication applies to the current backup job and it applies to duplicated contents within a file.
- **All files within the same backup set** – deduplication applies across different files in the backup set.

```
<!-- This shows the deduplication setting -->
<Key name="Deduplication Setting">
  <!-- Enable deduplication -->
  <!-- Y: Yes -->
  <!-- N: No -->
  <Value data="Y" name="Enable" type="boolean" />
  <!-- Deduplication scope -->
  <!-- F: Same file path within the same backup set -->
  <!-- B: All files within the same backup set -->
  < Value data="B" name="Deduplication level" type="string" />
</Key>
</Key>
</Setting>
```

Example of MySQL Database Backup Set with normal backup schedule

Backup set configurations:

Backup Set Name	MySQL Database 1
Temporary Working Directory	/temp
Remove temporary files after backup	Yes
Compression Type	Fast
Daily schedule	7:30 PM
Destination	B247CBS, Local Drive (/localbackup)
Backup Source	MySQL/classicmodels, MySQL/employees, MySQL/sakila, MySQL/world
Exclude	MySQL/information_schema, MySQL/performance_schema
Deduplication scope	All files within the same backup set

MySQL database settings:

ID	root
Password	pwd123
Hostname	localhost
Port	3306
Mysqldump path	/usr/bin/mysqldump

*Configurable items are highlighted in red.

```
<?xml version="1.0" encoding="UTF-8"?>
<Setting>
  <!-- This is the backup set setting -->
  <Key name="Backup Set Setting" allowMultiple="Y">
    <!-- Backup set type (Read Only) -->
    <Value data="MySQL" name="Type" type="string" />
    <!-- Backup set name -->
    <Value data="MySQL Database 1" name="Name" type="string" />
    <!-- Temporary directory for storing backup files -->
    <Value data="/tmp" name="Temporary Working Directory"
    type="string" />
    <!-- Remove temporary files after backup -->
    <!-- Y: Yes -->
    <!-- N: No -->
    <Value data="Y" name="Delete temporary files after backup"
    type="boolean" />
    <!-- Select compression type -->
    <!-- GzipDefaultCompression : Normal -->
    <!-- GzipBestSpeedCompression: Fast (Compressed size larger than
normal) -->
    <!-- SnappyDefaultCompression: Fast with optimization for local -->
    <!-- Leave the field blank for no compression -->
    <Value data="GzipBestSpeedCompression" name="Compression Type"
    type="string" />
  <!-- This shows the MySQL Database setting -->
  <Key name="MySQL Database Setting">
    <!-- MySQL Login Name -->
    <Value data="root" name="Username" type="string" />
    <!-- MySQL Password -->
    <Value data="pwd123" name="Password" type="string" />
    <!-- MySQL Host -->
    <Value data="localhost" name="Host" type="string" />
  </Key>
</Setting>
```

```

    <!-- MySQL Port -->
    <Value data="3306" name="Port" type="string" />
    <!-- Path to mysqldump -->
    <Value data="/usr/bin/mysqldump" name="mysqldump path"
    type="string" />
  </Key>
  <!-- This includes the database you want to backup -->
  <!-- Copy and paste the whole <Key> to add more selected sources --      >
  <Key name="Selected Source">
    <!-- Please enter the path in the format of
    "MySQL/_YOUR_FILE_NAME_" -->
    <Value data="MySQL/classicmodels" name="Path" type="string" />
  </Key>
  <Key name="Selected Source">
    <!-- Please enter the path in the format of
    "MySQL/_YOUR_FILE_NAME_" -->
    <Value data="MySQL/employees" name="Path" type="string" />
  </Key>
  <Key name="Selected Source">
    <!-- Please enter the path in the format of
    "MySQL/_YOUR_FILE_NAME_" -->
    <Value data="MySQL/sakila" name="Path" type="string" />
  </Key>

  <Key name="Selected Source">
    <!-- Please enter the path in the format of
    "MySQL/_YOUR_FILE_NAME_" -->
    <Value data="MySQL/world" name="Path" type="string" />
  </Key>
  <!-- This excludes the database from the included source -->
  <!-- Copy and paste the whole <Key> to add more deselected sources      -->
  <Key name="Deselected Source">
    <!-- Please enter the path in the format of
    "MySQL/_YOUR_FILE_NAME_" -->
    <Value data="MySQL/information_schema" name="Path"
    type="string" />
  </Key>
  <Key name="Deselected Source">
    <!-- Please enter the path in the format of
    "MySQL/_YOUR_FILE_NAME_" -->
    <Value data="MySQL/performance_schema" name="Path"
    type="string" />
  </Key>
  <!-- Settings for your scheduled backups -->
  <Key name="Schedule Settings">
    <!-- Enable scheduled backup on this computer -->
    <!-- Y: Yes -->
    <!-- N: No -->
    <Value data="Y" name="Enable" type="boolean" />
    <!-- Daily settings -->
    <!-- Copy and paste the whole <Key> to add more daily schedules
-->
    <Key name="Daily Schedule Settings">
      <!-- Name of schedule -->
      <Value data="Daily-Schedule" name="Name" type="string" />
      <!-- Start hour -->
      <!-- 0, 1, 2... 23 -->
      <!-- This value will be ignored if the schedule is set to be
periodic ("Interval" field contains value other than -1) -->
      <Value data="19" name="Hour" type="integer" />
      <!-- Start minute -->
      <!-- 0, 1, 2... 59 -->
      <!-- This value will be ignored if the schedule is set to be
periodic ("Interval" field contains value other than -1) -->
      <Value data="30" name="Minute" type="integer" />
      <!-- Interval -->
      <!-- 1 : 1 minute -->
      <!-- 2 : 2 minutes -->

```

```

        <!-- 3 : 3 minutes -->
        <!-- 4 : 4 minutes -->
        <!-- 5 : 5 minutes -->
        <!-- 6 : 6 minutes -->
        <!-- 10 : 10 minutes -->
        <!-- 12 : 12 minutes -->
        <!-- 15 : 15 minutes -->
        <!-- 20 : 20 minutes -->
        <!-- 30 : 30 minutes -->
        <!-- 60 : 1 hour -->
        <!-- 120: 2 hours -->
        <!-- 180: 3 hours -->
        <!-- 240: 4 hours -->
        <!-- 360: 6 hours -->
        <!-- 480: 8 hours -->
        <!-- 720: 12 hours -->
        <!-- A value of -1 means a non-periodic normal schedule -->
        <Value data="-1" name="Interval" type="integer" />
    </Key>
</Key>
<!-- This is the collection of destinations -->
<Key name="Destination Settings">
    <Value data="-1" name="concurrency-level" type="integer" />
    <!-- B247CBS destination is where the files are backup to server -->
    <Key name="B247CBS Destination Settings">
    </Key>
    <!-- Local destination means backup files are stored in your
computer -->
    <!-- Copy and paste the whole <Key> to add more local
destinations -->
    <Key name="Local Destination Settings">
        <!-- Name of your destination -->
        <Value data="local" name="Name" type="string" />
        <!-- Directory to store your backup files -->
        <!-- e.g. /tmp -->
        <Value data="/localbackup" name="Local Path" type="string"
/>
    </Key>
</Key>
<!-- This shows the deduplication setting -->
<Key name="Deduplication Setting">
    <!-- Enable deduplication -->
    <!-- Y: Yes -->
    <!-- N: No -->
    <Value data="Y" name="Enable" type="boolean" />
    <!-- Deduplication scope -->
    <!-- F: Same file path within the same backup set -->
    <!-- B: All files within the same backup set -->
    <Value data="B" name="Deduplication level" type="string" />
</Key>
</Key>
</Setting>

```


Example of MySQL Database Backup Set with periodic backup schedule

Backup set configurations:

Backup Set Name	MySQL Daily
Temporary Working Directory	/tmp
Remove temporary files after backup	Yes
Compression Type	Fast
Weekly schedule	Every 8 hours from Monday to Friday
Destination	B247CBS
Backup Source	All MySQL databases
Exclude	MySQL/information_schema, MySQL/performance_schema
Deduplication scope	All files within the same backup set

MySQL database settings:

ID	root
Password	pwd123
Hostname	localhost
Port	3306
Mysqldump path	/usr/bin/mysqldump

***Configurable items are highlighted in red.**

```
<?xml version="1.0" encoding="UTF-8"?>
<Setting>
  <!-- This is the backup set setting -->
  <Key name="Backup Set Setting" allowMultiple="Y">
    <!-- Backup set type (Read Only) -->
    <Value data="MySQL" name="Type" type="string" />
    <!-- Backup set name -->
    <Value data="MySQL Daily" name="Name" type="string" />
    <!-- Temporary directory for storing backup files -->
    <Value data="/tmp" name="Temporary Working Directory"
    type="string" />
    <!-- Remove temporary files after backup -->
    <!-- Y: Yes -->
    <!-- N: No -->
    <Value data="Y" name="Delete temporary files after backup"
    type="boolean" />
    <!-- Select compression type -->
    <!-- GzipDefaultCompression : Normal -->
    <!-- GzipBestSpeedCompression: Fast (Compressed size larger than
    normal) -->
    <!-- SnappyDefaultCompression: Fast with optimization for local -->
    <!-- Leave the field blank for no compression -->
    <Value data="GzipBestSpeedCompression" name="Compression Type"
    type="string" />
    <!-- This shows the MySQL Database setting -->
    <Key name="MySQL Database Setting">
      <!-- MySQL Login Name -->
      <Value data="root" name="Username" type="string" />
      <!-- MySQL Password -->
      <Value data="pwd123" name="Password" type="string" />
      <!-- MySQL Host -->
      <Value data="localhost" name="Host" type="string" />
      <!-- MySQL Port -->
      <Value data="3306" name="Port" type="string" />
    </Key>
  </Key>
</Setting>
```

```

<!-- Path to mysqldump -->
<Value data="/usr/bin/mysqldump" name="mysqldump path"
type="string" />
</Key>
<!-- This includes the database you want to backup -->
<!-- Copy and paste the whole <Key> to add more selected sources - ->
<Key name="Selected Source">
  <!-- Please enter the path in the format of
  "MySQL/_YOUR_FILE_NAME_" -->
  <Value data="MySQL" name="Path" type="string" />
</Key>
<Key name="Deselected Source">
  <!-- Please enter the path in the format of
  "MySQL/_YOUR_FILE_NAME_" -->
  <Value data="MySQL/information_schema" name="Path"
type="string" />
</Key>
<Key name="Deselected Source">
  <!-- Please enter the path in the format of
  "MySQL/_YOUR_FILE_NAME_" -->
  <Value data="MySQL/performance_schema" name="Path"
type="string" />
</Key>

<!-- Settings for your scheduled backups -->
<Key name="Schedule Settings">
  <!-- Enable scheduled backup on this computer -->
  <!-- Y: Yes -->
  <!-- N: No -->
  <Value data="Y" name="Enable" type="boolean" />
  <Key name="Weekly Schedule Settings">
    <!-- Name of schedule -->
    <Value data="Weekly-Schedule" name="Name" type="string" />
    <!-- Start hour -->
    <!-- 0, 1, 2... 23 -->
    <!-- This value will be ignored if the schedule is set to be
periodic ("Interval" field contains value other than -1) -->
    <Value data="21" name="Hour" type="integer" />
    <!-- Start minute -->
    <!-- 0, 1, 2... 59 -->
    <!-- This value will be ignored if the schedule is set to be
periodic ("Interval" field contains value other than -1) -->
    <Value data="0" name="Minute" type="integer" />
    <!-- Interval -->
    <!-- 1 : 1 minute -->
    <!-- 2 : 2 minutes -->
    <!-- 3 : 3 minutes -->
    <!-- 4 : 4 minutes -->
    <!-- 5 : 5 minutes -->
    <!-- 6 : 6 minutes -->
    <!-- 10 : 10 minutes -->
    <!-- 12 : 12 minutes -->
    <!-- 15 : 15 minutes -->
    <!-- 20 : 20 minutes -->
    <!-- 30 : 30 minutes -->
    <!-- 60 : 1 hour -->
    <!-- 120: 2 hours -->
    <!-- 180: 3 hours -->
    <!-- 240: 4 hours -->
    <!-- 360: 6 hours -->
    <!-- 480: 8 hours -->
    <!-- 720: 12 hours -->
    <!-- A value of -1 means a non-periodic normal schedule -->
    <Value data="480" name="Interval" type="integer" />
    <!-- Backup on these days of the week -->
    <!-- Y: Yes -->
    <!-- N: No -->
    <Value data="N" name="Sunday" type="boolean" />
  </Key>
</Key>

```

```

        <Value data="Y" name="Monday" type="boolean" />
        <Value data="Y" name="Tuesday" type="boolean" />
        <Value data="Y" name="Wednesday" type="boolean" />
        <Value data="Y" name="Thursday" type="boolean" />
        <Value data="Y" name="Friday" type="boolean" />
        <Value data="N" name="Saturday" type="boolean" />
    </Key>
</Key>
<!-- This is the collection of destinations -->
<Key name="Destination Settings">
    <Value data="-1" name="concurrency-level" type="integer" />
    <!-- B247CBS destination is where the files are backup to server -->
    <Key name="B247CBS Destination Settings">
    </Key>
</Key>
<!-- This shows the deduplication setting -->
<Key name="Deduplication Setting">
    <!-- Enable deduplication -->
    <!-- Y: Yes -->
    <!-- N: No -->
    <Value data="Y" name="Enable" type="boolean" />
    <!-- Deduplication scope -->
    <!-- F: Same file path within the same backup set -->
    <!-- B: All files within the same backup set -->
    <Value data="B" name="Deduplication level" type="string" />
</Key>
</Key>
</Setting>

```